

No. of Contact	A ± 0.25 ± 0.10	B ± 0.13 ± 0.05	C ± 0.38 ± 0.15	D ± 0.25 ± 0.10
09	16.90	25.00	30.80	11.08
15	25.35	33.30	39.20	19.39
25	39.00	47.04	53.04	33.24
37	55.42	63.50	69.40	49.86


Voltage Current Rating: 5 AMP.
Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 5000M Ω Min.
 Temperature Range: -25 $^{\circ}$ C to +85 $^{\circ}$ C

PART NO: B05-0XX5X14D-02

NO.OF CONTACT:
 09 = 9 pos
 15 = 15 pos
 25 = 25 pos
 37 = 37 pos

HOUSING COLOR:
 1 = BLACK
 5 = WHITE
 6 = BLUE

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
5	SCREW	STEEL	PALTING: Ni	
4	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 2 μ " SOLDER AREA: Au 2 μ " UNDER-PLATING: Ni	

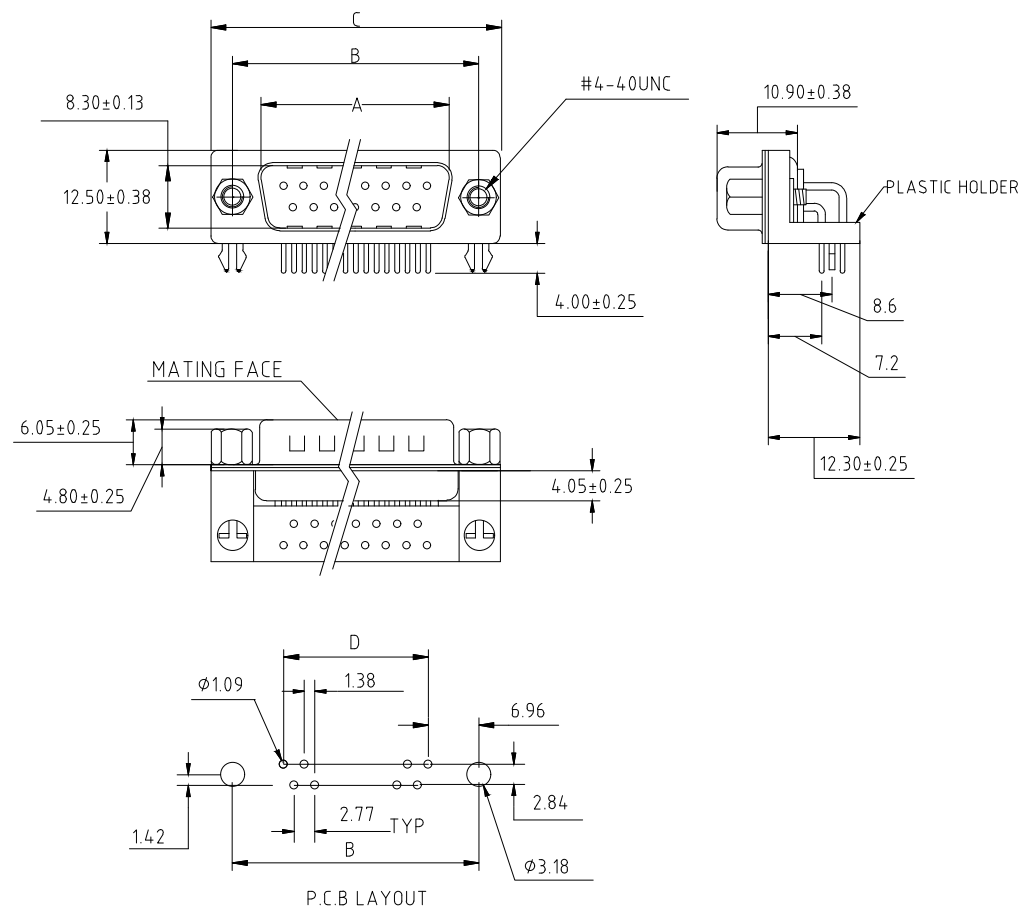

SIDE	DATE	DESCRIPTION	APPROVER	QUALITY SYMBOLS	Tolerance	NAME:	REV:	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.
	2011/06/12	NEW ISSUE	JINGLI	□: CRITICAL ⊕: MAJOR ▽: ZERO DEFECT S.P.C	x. ±0.50 .x ±0.30 .xx ±0.25	D-SUB 车针头90度插板, 铆合锁螺丝 (客户用图)	A			JINGLI	KING ZHOU		B05-009

lineconn 东莞市林诚塑胶电子有限公司
<http://www.lineconn.com>
 TEL: 0769-85181660 85181770