















MATERIALS:

- Housing: Plastic thermoplastic LCP E1301 UL94V-0 black
- Contact: Copper alloy gold selective plated
- Front Shell: Brass,Nickel plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

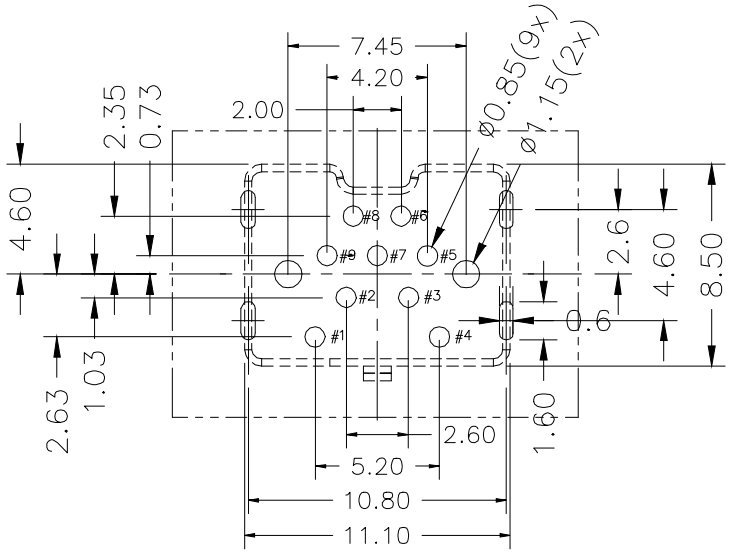


PCB LAYOUT

| SIDE | DATE | DESCRIPTION | APPROVER |
|---|---|---|---|
| 3 | | | |
| 2 | 2017/06/07 | 按客户要求增加尺寸 | JANE ZHEN |
| 1 | 2017/04/21 | 新版发行 | JANE ZHEN |

QUALITY SYMBOLS

□: CRITICAL ⊠: MAJOR

▽: ZERO DEFECT ▽C: S.P.C

| Toleance | |
|---|---|
| x. | ±0.50 |
| .x | ±0.30 |
| .xx | ±0.10 |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| NAME: | IEEE 1394 9Pin Female 180° DIP (客户用图) | | | PART NO. | B19-009813A0-01 | | |
| REV: | B | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| SCALE: | NONE | DATE: | 2017/04/21 | DAW NHU | KING ZHOU | | B19-001 |

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770