


L TYPE



S TYPE

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C


PART NO: B03-0XX418EB-0X

No. OF CONTACTS: _____
 26= 26P
 36= 36P
 50= 50P
 68= 68P

BRACKET FINISHES: _____
 L:LATCH BRACKET
 S:SCREW BRACKET

Dimensions:

No. of contacts:	A	B	C	D
26	37.20	31.20	20.25	24.70
36	43.50	37.60	26.60	31.00
50	52.60	46.50	35.40	40.10
68	64.00	57.90	46.90	51.00

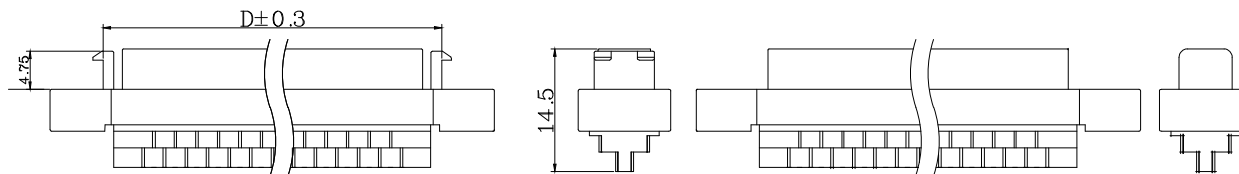

4	COVER	PBT+30%GF	COLOR:BLACK
3	HOUSING	PBT+30%GF	COLOR:BLACK
2	SHELL	ZINC ALLOY	PLATING:Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni
ITEM	DESC.	MATERIAL	REMAKS
			PART REMAKS

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
 ∇: ∇: ZERO DEFECT S.P.C

Tolerance

x. ±0.50
 .x ±0.30
 .xx ±0.25

NAME:

SCSI FEMALE SOLDER 锌合金壳26, 36, 50, 68P
 (客户用图)

REV:

A UNIT: mm DRW BY

SCALE:

N:1 DATE: 2011/06/11 JINGLI

PART NO.


B03-0XX418EB-0X

CHK BY

APP BY DRAWING NO.

KING ZHOU

B03-044



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
 TEL: 0769-85181660 85181770

△	2011/06/11	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER