


RoHS

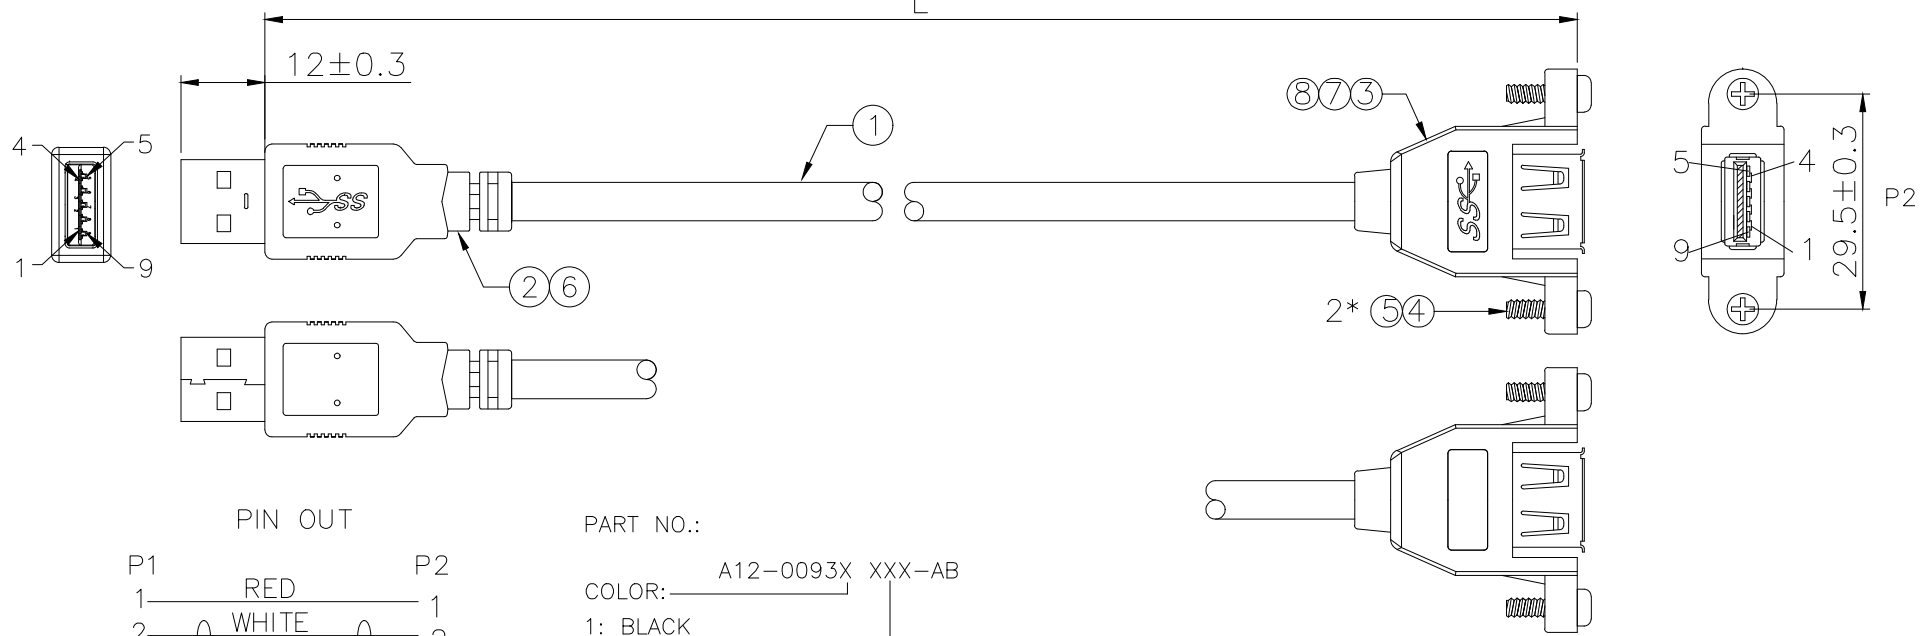

PIN OUT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	8
6	YELLOW	9
7	DRAIN	7
8	PURPLE	5
9	ORANGE	6
SHELL	DRAIN	SHELL

PART NO.: A12-0093X XXX-AB
 COLOR: 1: BLACK 6: BLUE
 LENGTH: 010:1m 100:10m

NOTE:
 1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm M n;
 4. HI-POT DC 300V;

NO.	MATERIAL	DESCRIPTION	Q'TY	VENDOR
8	PE	LD-PE	/	
7	PVC	35P BLUE PVC	/	
6	PVC	45P BLUE PVC	/	
5	螺丝	4*10MM M3螺丝	2PCS	
4	螺母	M3螺母	2PCS	
3	CONN. 2	USB(3.0)AF 蓝胶 PIN镀1u" 铁壳镀镍 一体式	1PC	
2	CONN. 1	USB(3.0)AM 蓝胶 PIN镀1u" 铁壳镀镍 三件式	1SET	
1	CABLE	UL2725 (USB3.0) (1P#28+AE)*2+2C#24+1P#28+AEB(AL) OD: 5.5MM	/	

				QUALITY SYMBOLS	Tolerance		NAME: USB 3.0 AM TO 3.0 AF CABLE M3螺母 29.5mm (客户用图)			PART NO. A12-0093X XXX-AB			
				□: CRITICAL	⊗: MAJOR	尺寸(MM)	公差(MM)	REV: A	UNIT: mm	DRW BY: Jing Li	CHK BY: Jack Chen	APP BY:	DRAWING NO. A12-005
△	2017/01/07	FIRST ISSUE	JING LI	▽: ZERO DEFECT	▽: S.P.C	300~2000	±50	SCALE: NONE	DATE: 2017/01/07	http://www.lineconn.com			
SIDE	DATE	DESCRIPTION	APPROVER			2001~5000	±100			lineconn 东莞市林诚塑胶电子有限公司 TEL:0769-85181660 85181770			
8	7	6	5			5001~	±150						