

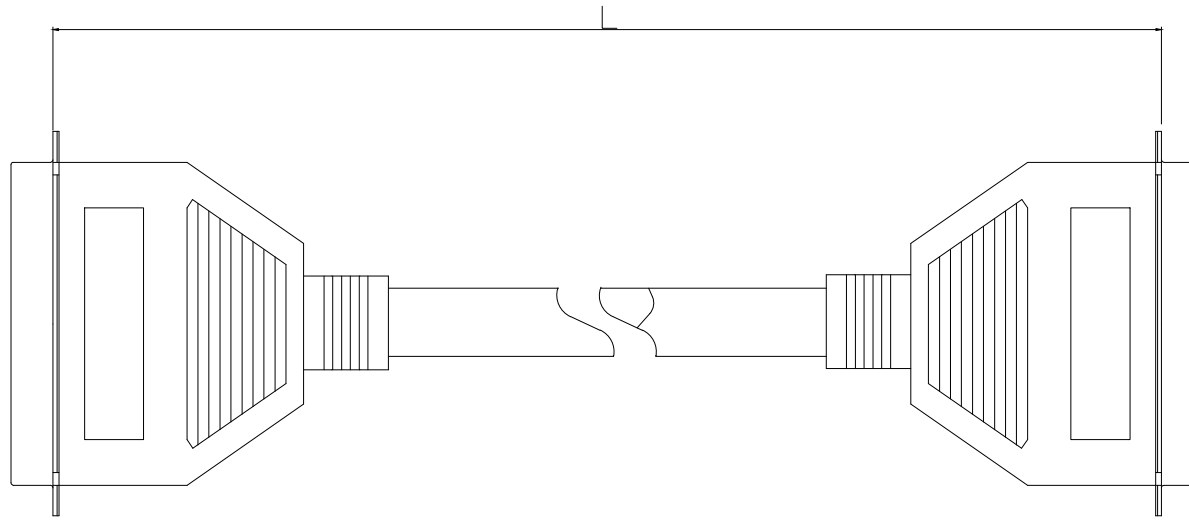



RoHS

P1

P2

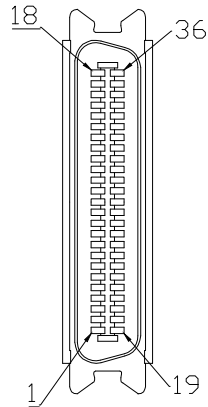

PIN ASSIGNMENT

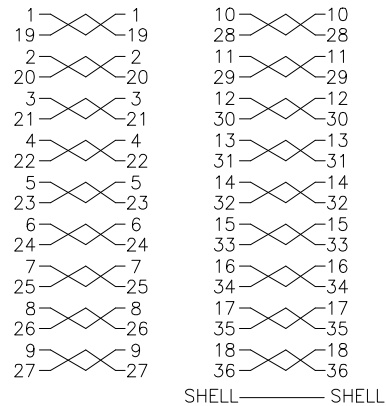

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

| | | | |
|------|-------------|---|------|
| 6 | CABLE | UL20276 18.5P*28AWG+Foamed PP Tape+ABD PVC JACKET COLOR:BLACK ØD=8.0mm | 1PCS |
| 5 | COPPER FOIL | COPPER FOIL W=25MM | NA |
| 4 | OVERMOLD | 45P PVC COLOR: BLACK | NA |
| 3 | MOLD | PE | NA |
| 2 | CONNECTOR | CN (57) 36Pin Male | 1PCS |
| 1 | CONNECTOR | CN (57) 36Pin Male | 1PCS |
| ITEM | PART NAME | DESCRIPTION | QY'T |

| | | | |
|------|------------|-------------|-----------|
| △ | | | |
| △ | | | |
| △ | 2009/07/10 | 新版发行 | JACK CHEN |
| SIDE | DATE | DESCRIPTION | APPROVER |
| 8 | 7 | 6 | 5 |

| | | | |
|-----------------|-------|-----------|--------|
| QUALITY SYMBOLS | | Tolerance | |
| □ : | ⊠ : | 尺寸(CM) | 公差(CM) |
| CRITICAL | MAJOR | 30~200 | ±10 |
| ▽ : | ▽ : | 201~500 | ±20 |
| ZERO DEFECT | S.P.C | 501~ | ±30 |

| | | | | | | | |
|---------------|-----------------------------------|-------|------------|---|-----------------|--------|-------------|
| NAME: | CN(57) 36P MALE-MALE CABLE (客户用图) | | | PART NO. | A21-03611XXX-01 | | |
| REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| SCALE: | NONE | DATE: | 2009/07/10 | JACK CHEN | KING ZHOU | | A21-001 |
| 东莞市林诚塑胶电子有限公司 | | | | http://www.lineconn.com TEL:0769-85181660 85181770 | | | |
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |