



RoHS

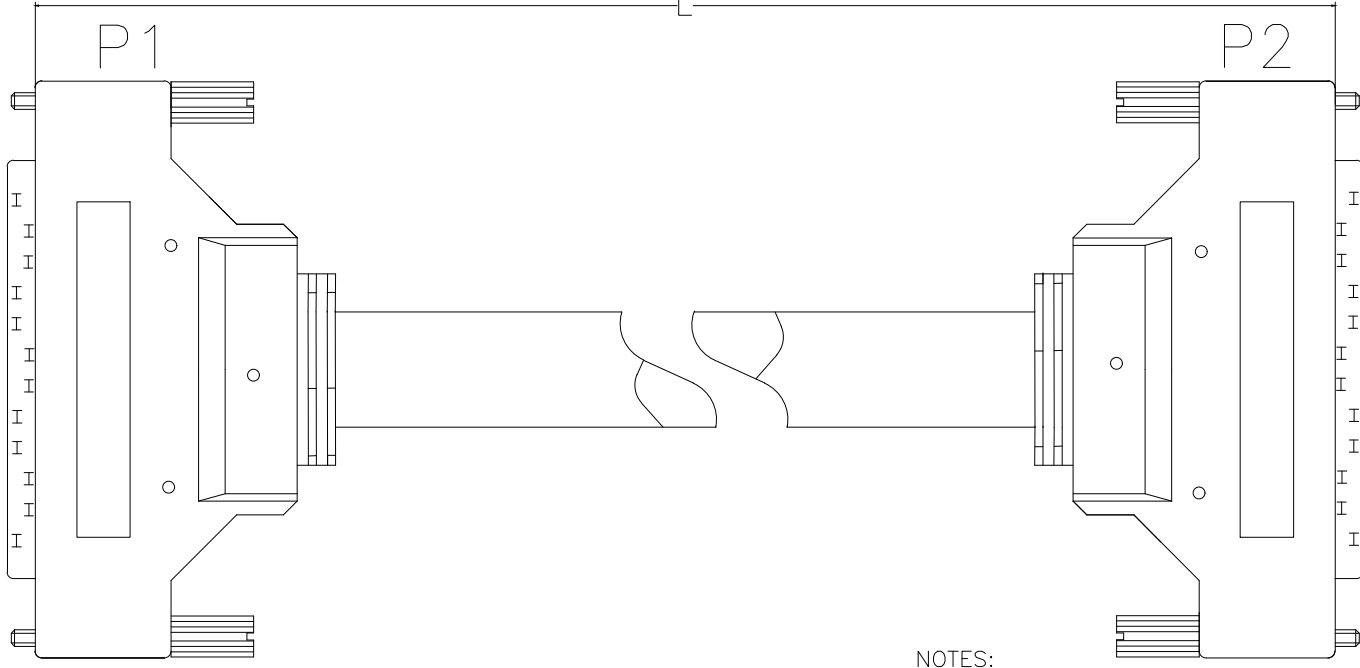

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

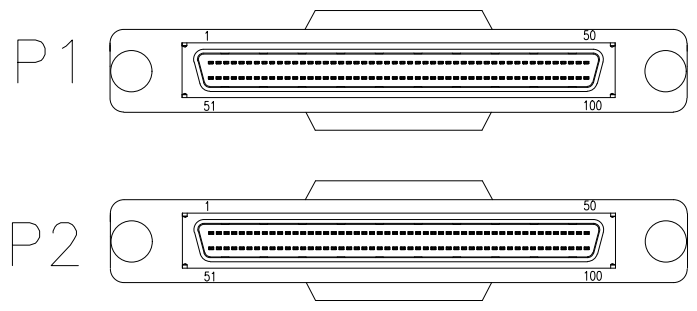

PIN ASSIGNMENT

P1	SIGNAL	P2	ITEM	PART NAME	DESCRIPTION	QY'T
1		1	4	OVERMOLD	PVC 45P,COLOR:BLACK	
2		2	3	SCREW	STEEL,PLATED NI,#2-56	4PCS
3		3	2	CABLE	UL20276 (25P*28#+Mylar))+ 25P*28#+Foamed PP Tape AL.MYLAR+Drain+Braid PVC JACKET COLOR:BLACK OD= 11.5mm	1PCS
4~97		4~97	1	CONNECTOR	HPDB SCSI 100Pin Male Molded TYPE	2SET
98		98				
99		99				
100		100				
Shell		Shell				

△			
△			
△	2015/05/13	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME: SCSI II 100P CABLE MOLDED		PART NO. A08-10011XXX-01	
□:	☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm
CRITICAL	MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2015/05/13
▽:	▽:	2001~5000	±100			DRW BY:	Jing Li
ZERO DEFECT	S.P.C	5001~	±150			CHK BY:	Jack Chen
				http://www.lineconn.com			
				TEL:0769-85181660 85181770			

lineconn 东莞市林诚塑胶电子有限公司