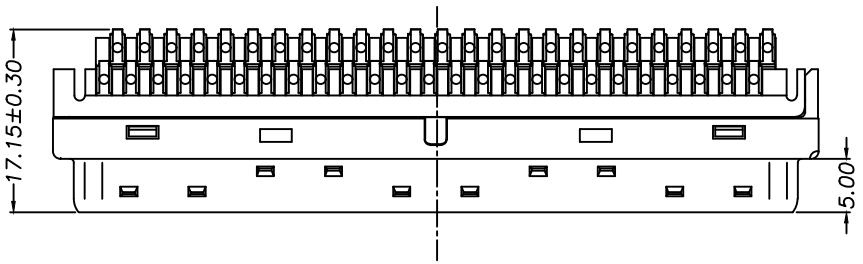



SEC. A–A
SCAL 2:1

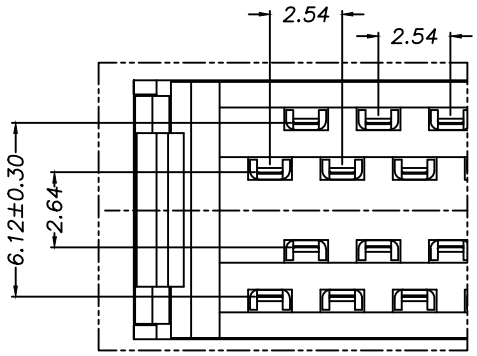

VIEW. B
SCAL 4:1

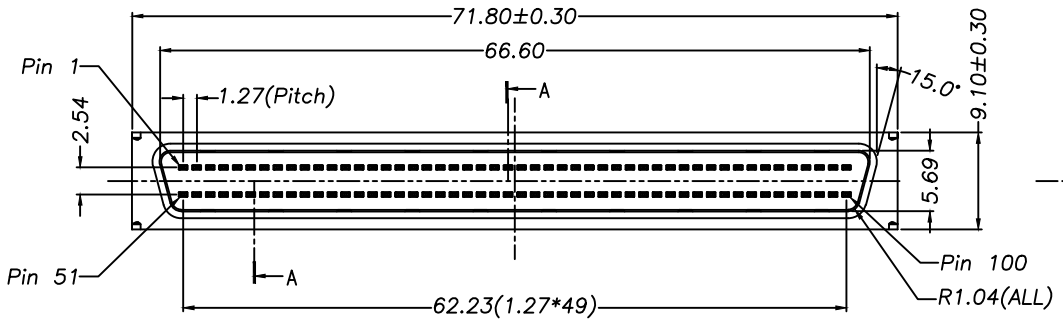



- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: −25°C ~ +85°C

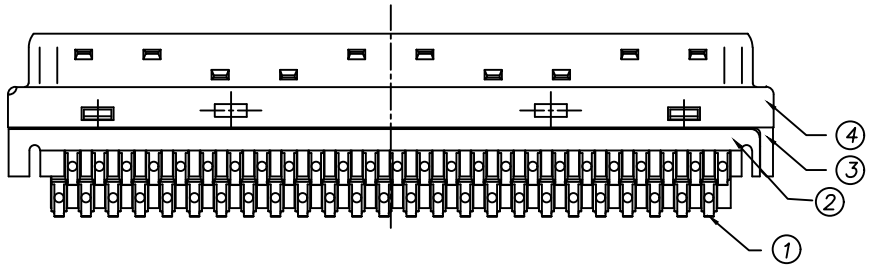

ITEM	DESC.	MATERIAL	REMARKS
1	TERMINAL	COPPER ALLOY (T=0.40)	CONTACT AREA:Au 5u" SOLDER AREA:Sn 100u"
2	HOUSING	PBT,UL94V-0	COLOR:BLACK
3	COVER	LCP,UL94V-0	COLOR:BLACK
4	SHELL	STELL(T=0.50)	Ni 120u" OVER Cu 100u"

SIDE	DATE	DESCRIPTION	APPROVER
⚠	2008/07/16	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance	
x.	±0.50
.x	±0.30
.xx	±0.25

NAME:	SCSI II(HPDB) 100P MALE SOLDER MOLDED CONN. (客户用图)				PART NO.	B02-100311EN-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2008/07/16	JINGLI	KING ZHOU		B02-008

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770