


RoHS

P1


P2

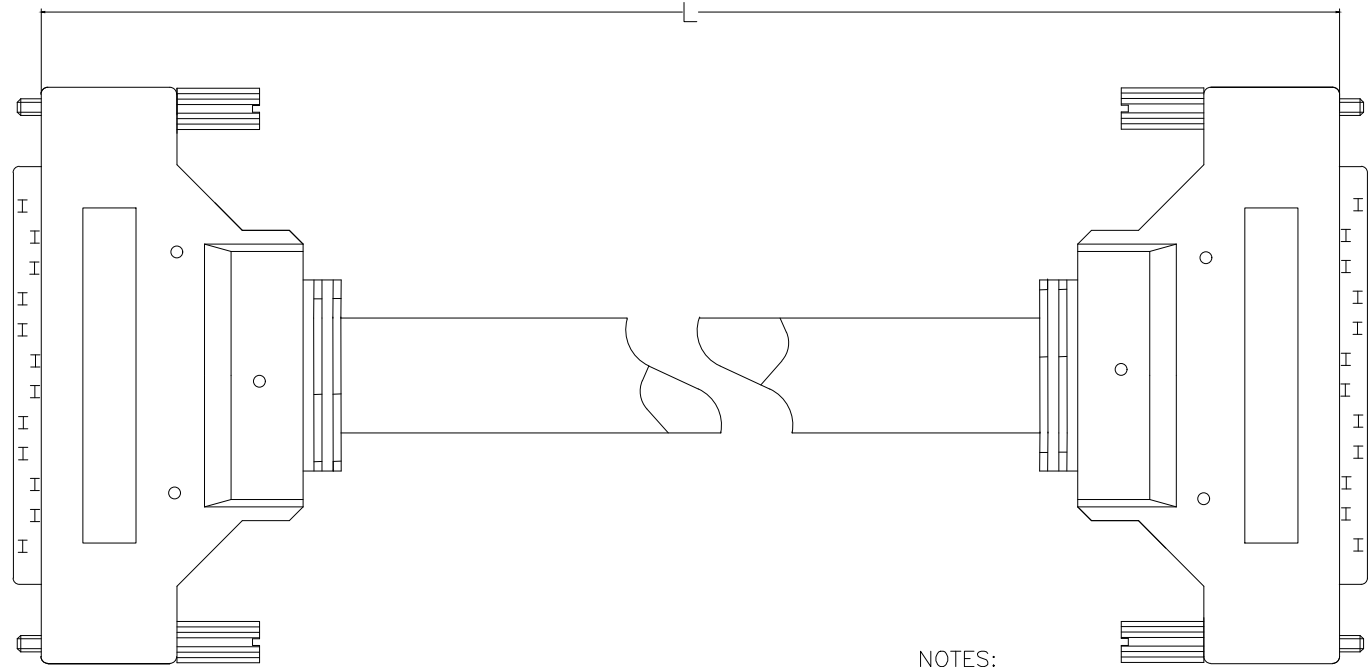


NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

P1

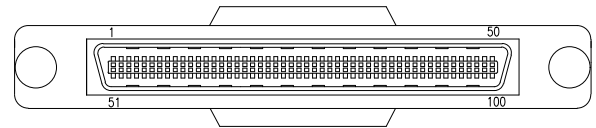

P2

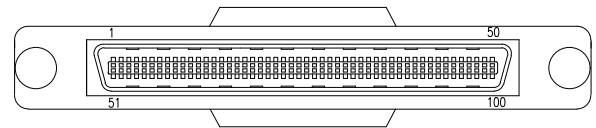

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~97		4~97
98		98
99		99
100		100
Shell		Shell

ITEM	PART NAME	DESCRIPTION	QY'T
4	OVERMOLD	45P PVC,COLOR BLACK	4PCS
3	SCREW	STEEL,PLATED NI,M2.6	4PCS
2	CABLE	UL20276 (25P*28#+Mylar))+ 25P*28#+Foamed PP Tape AL.MYLAR+Drain+Braid PVC JACKET COLOR:BLACK OD= 11.5mm	1PCS
1	CONNECTOR	HPCN SCSI 100Pin Male Molded TYPE	2SET

△			
△			
△	2015/05/13	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS  
 □: CRITICAL  
 ▽: ZERO DEFECT  
 ⊗: MAJOR  
 ▽: S.P.C

Tolerance	
尺寸(MM)	公差(MM)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	SCSI 100P CABLE MOLDED (客户用图)				PART NO.	A06-10011XXX-01				
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
SCALE:	NONE	DATE:	2015/05/13	Jing Li	Jack Chen	A06-005				
东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770										
8	7	6	5	4	3	2	1			