


RoHS

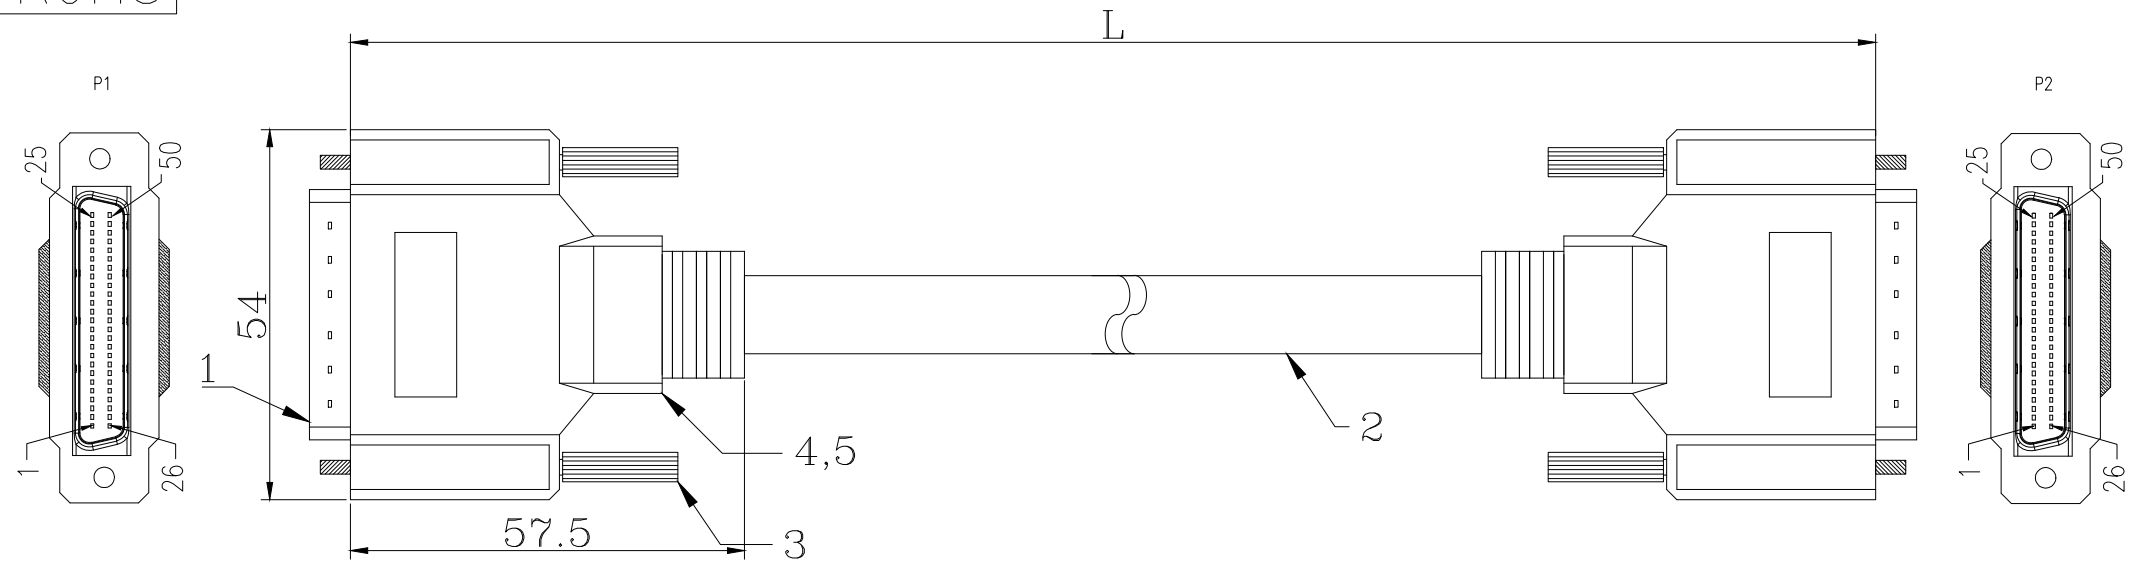

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
  2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
  3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
  4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

P1	SIGNAL	P2	ITEM	PART NAME	DESCRIPTION	QY'T
1		1	5	INNER MOLD	LDPE	
2		2	4	OVER MOLD	45P PVC COLOR: BLACK	
3		3	3	SCREW	SCREW #2-56 Ni	
4~47		4~47	2	CABLE	UL20276 28AWG*25P+AL+BRAID PVC JACKET COLOR:BLACK OD=8.5mm	1PCS
48		48				
49		49	1	CONNECTOR	HPDB 50PIN MALE MOLDED TYPE	2PCS
50		50				
Shell		Shell				

△			
△			
△	2016/08/22	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	尺寸(MM)	公差(MM)
CRITICAL	MAJOR	300~2000	±50
▽:	▽:	2001~5000	±100
ZERO DEFECT	S.P.C	5001~	±150

NAME:	SCSI II 50P MALE CABLE MOLDED 黑色 (客户用图)			PART NO.	A08-05011XXX-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2016/08/22	Jing Li	Jack Chen		A08-001
东莞市林诚塑胶电子有限公司				<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770			
8	7	6	5	4	3	2	1