


RoHS

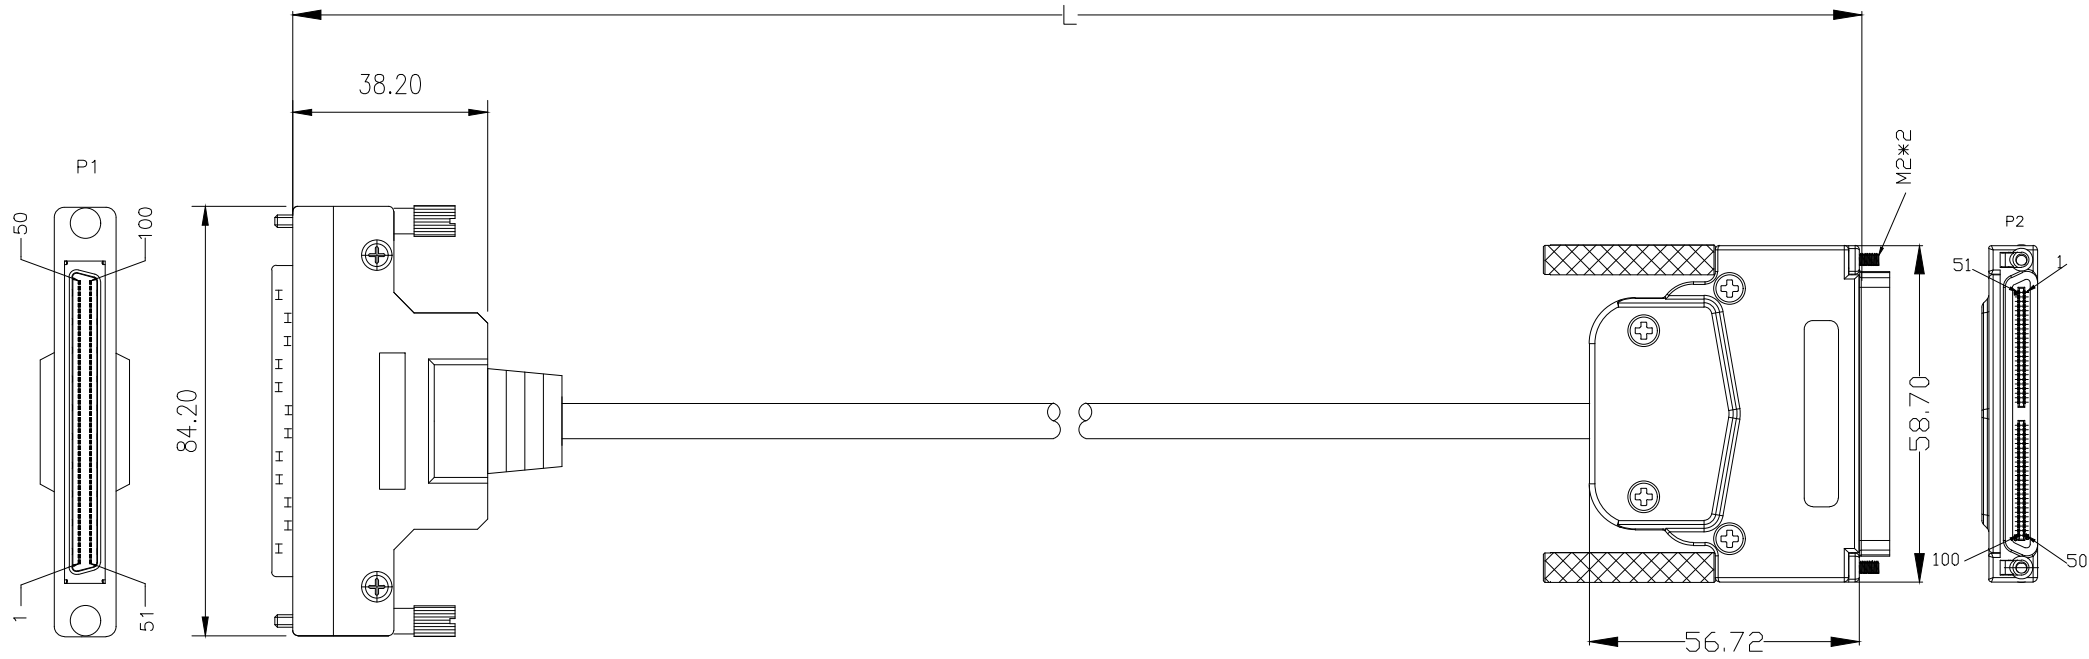

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~97		4~97
98		98
99		99
100		100
Shell		Shell

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QY'T
3	CABLE	UL20276 (25P*28#+Mylar)+ 25P*28#+Foamed PP Tape AL.MYLAR+Drain+Braid PVC JACKET COLOR:BLACK OD= 11.5mm	
2	CONNECTOR	HONDA 100Pin Male ASS'Y TYPE	1SET
1	CONNECTOR	HPDB SCSI 100Pin Male ASS'Y TYPE	1SET

△			
△			
△	2016/04/16	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	尺寸(MM)	公差(MM)
		300~2000	±50
CRITICAL	MAJOR	2001~5000	±100
▽:	▽:	5001~	±150
ZERO DEFECT	S.P.C		

NAME:		SCSI II 100P TO HONDA 100P MALE CABLE ASSEMBLY SCREW (客户用图)			PART NO.	A09-10061XXX-03		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	NONE	DATE:	2016/04/16	Jing Li	Jack Chen		A09-003	
				东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770				
3	2	1						