

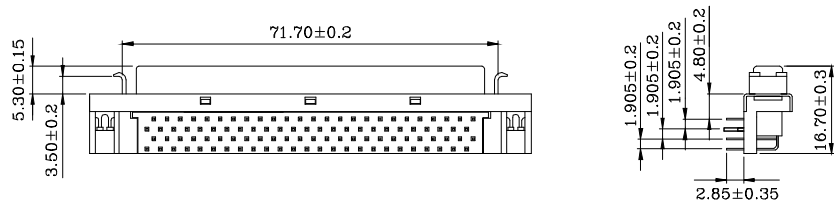
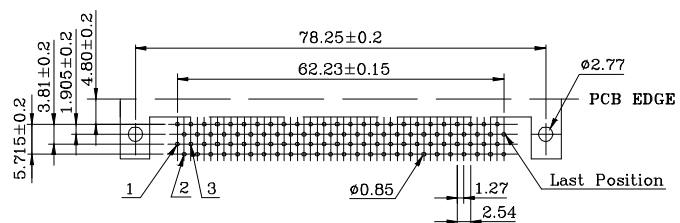


L Type



S Type

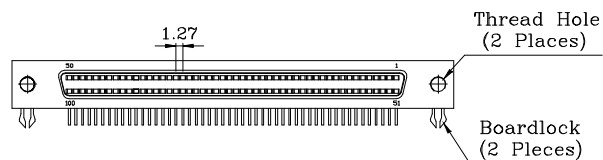

PCB Layout (B)

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO:
B02-100611EC-2X

BRACKET FINISHES:


L:LATCH BRACKET

S:SCREW BRACKET

6	BOARDLOCK	COPPER ALLOY	PLATING: Tin	
5	BRACKET	SPCC	PLATING: Ni	
4	COVER	PBT+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

			QUALITY SYMBOLS
			Tolerance
△	2008/06/11	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

NAME:		SCSI PIN TYPE 100P F 90° DIP (客户用图)				PART NO.	B02-100611EC-2X		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2008/06/11	JINGLI	KING ZHOU		B02-014		
lineconn		东莞市林诚塑胶电子有限公司				http://www.lineconn.com			
						TEL: 0769-85181660 85181770			



QUALITY SYMBOLS
 □: ⊠:
 CRITICAL MAJOR
 ZERO DEFECT S.P.C.