




- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

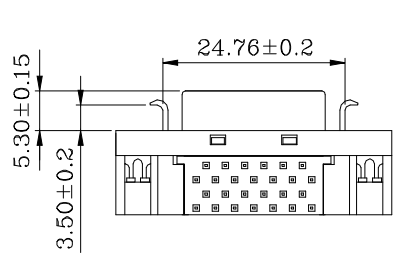

L Type



S Type

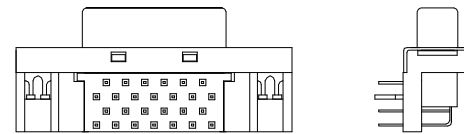


PART NO:  
B02-026611EC-1X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

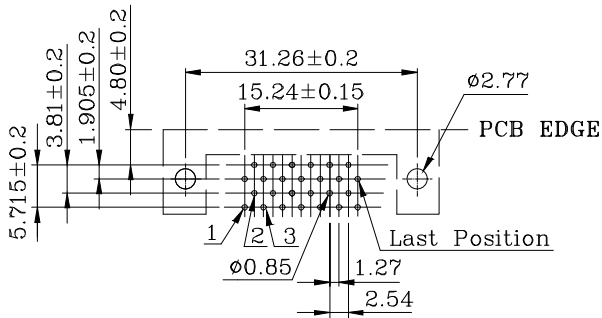

PCB Layout (A)

6	BOARDLOCK	COPPER ALLOY	PLATING: Tin	
5	BRACKET	SPCC	PLATING: Ni	
4	COVER	PBT+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□: CRITICAL  
▽: ZERO DEFECT  
⊗: MAJOR  
▽: S.P.C

Tolerance

x. ±0.50  
.x ±0.30  
.xx ±0.25

NAME:

SCSI PIN TYPE 26P F 90° DIP  
(客户用图)


REV: A

SCALE: N:1

UNIT: mm  
DATE: 2012/08/05  
DRW BY: JINGLI  
CHK BY: KING ZHOU

PART NO. B02-026611EC-1X

APP BY: DRAWING NO. B02-005



lineconn 东莞市林诚塑胶电子有限公司  
http://www.lineconn.com  
TEL: 0769-85181660 85181770

△	2012/08/05	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER