



- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

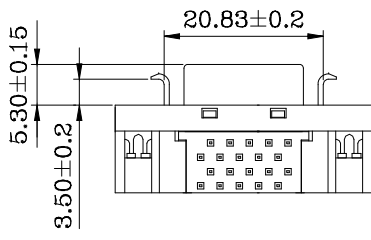

L Type




S Type

PART NO:  
B02-020611EC-1X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

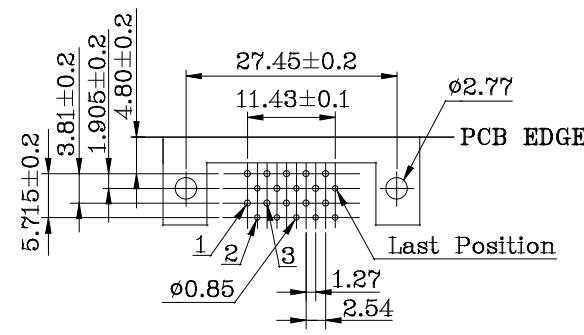

PCB Layout (B)

6	BOARDLOCK	COPPER ALLOY	PLATING:Ti	
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△	2012/07/08	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	Tolerance
□: CRITICAL	x: ±0.50
⊠: MAJOR	.x: ±0.30
▽: ZERO DEFECT	.xx: ±0.25
⊕	⊖

NAME:	SCSI PIN TYPE 20P F 90° DIP (客户用图)				PART NO.	B02-020611EC-2X		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2012/07/08	JINGLI	KING ZHOU		B02-004	
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com		TEL:0769-85181660 85181770		