

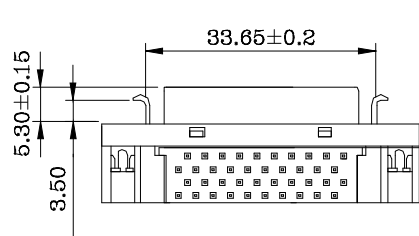


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

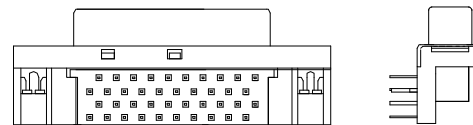

L Type




S Type

PART NO:
B02-040611EC-2X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

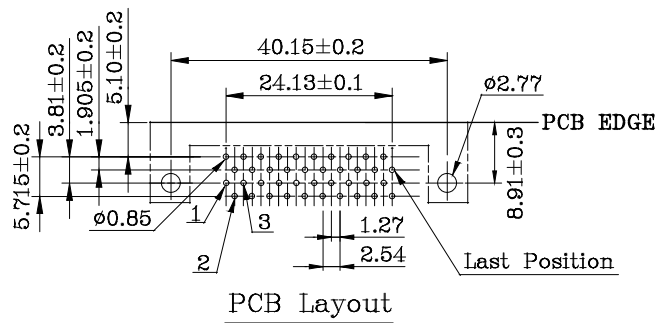

6	BOARDLOCK	COPPER ALLOY	PLATING:tin	
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25

NAME:

SCSI PIN TYPE 40P F 90° DIP
(客户用图)

REV:

A UNIT: mm DRW BY

SCALE:

N:1 DATE: 2012/08/22 JINGLI

PART NO.


B02-040611EC-2X

CHK BY

APP BY

KING ZHOU

DRAWING NO.
B02-006



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

△

2012/08/22

NEW ISSUE

JINGLI

SIDE

8

DESCRIPTION

7

APPROVER

6

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25

NAME:

SCSI PIN TYPE 40P F 90° DIP
(客户用图)

REV:

A UNIT: mm DRW BY

SCALE:

N:1 DATE: 2012/08/22 JINGLI

PART NO.


B02-040611EC-2X

CHK BY

APP BY

KING ZHOU

DRAWING NO.
B02-006



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

4

3

2

1