


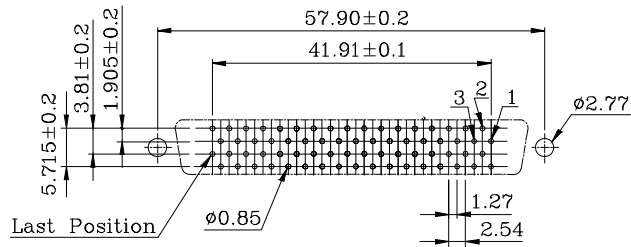


L Type

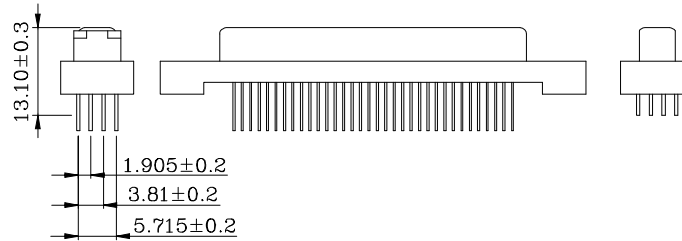

S Type

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

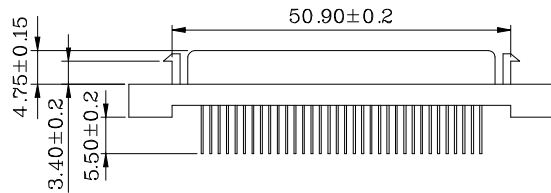

PCB Layout (BA)

PART NO:  
B02-068818EC-2X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

3	HOUSING	PBT+30%GF	COLOR:BLACK
2	SHELL	ZINC ALLOY	PLATING:Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni
ITEM	DESC.	MATERIAL	REMAKS

QUALITY SYMBOLS		Tolerance		NAME: SCSI PIN TYPE 68P F 180° DIP (客户用图)				PART NO. B02-068818EC-2X	
□ :	☒ :	x :	±0.50	REV: A	UNIT: mm	DRW BY: JINGLI	CHK BY: KING ZHOU	APP BY:	DRAWING NO. B02-011
CRITICAL	MAJOR	.x :	±0.30	SCALE: N:1	DATE: 2008/07/13				
▽ :	▽ :	.xx :	±0.25						
ZERO DEFECT	S.P.C								

△	2008/07/13	NEW ISSUE	JINGLI	QUALITY SYMBOLS	Tolerance	NAME: SCSI PIN TYPE 68P F 180° DIP (客户用图)	PART NO. B02-068818EC-2X				
SIDE	DATE	DESCRIPTION	APPROVER	CRITICAL	MAJOR	REV: A	UNIT: mm	DRW BY: JINGLI	CHK BY: KING ZHOU	APP BY:	DRAWING NO. B02-011
8	7	6	5	▽ :	▽ :	SCALE: N:1	DATE: 2008/07/13				
8	7	6	5	ZERO DEFECT	S.P.C						

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>  
TEL: 0769-85181660 85181770