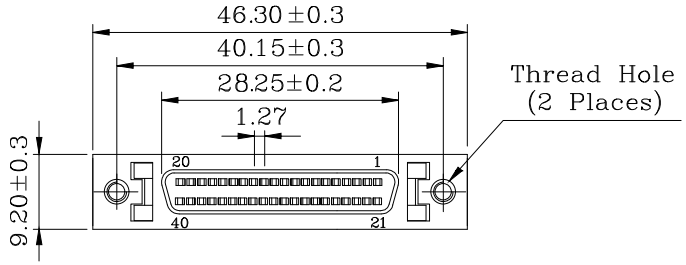

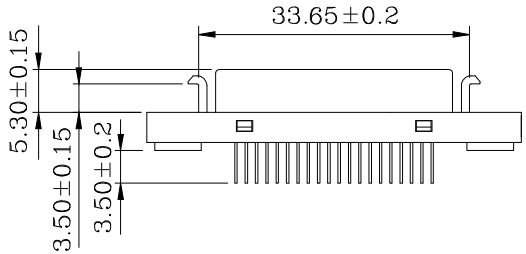

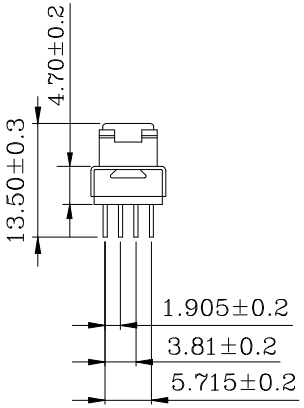

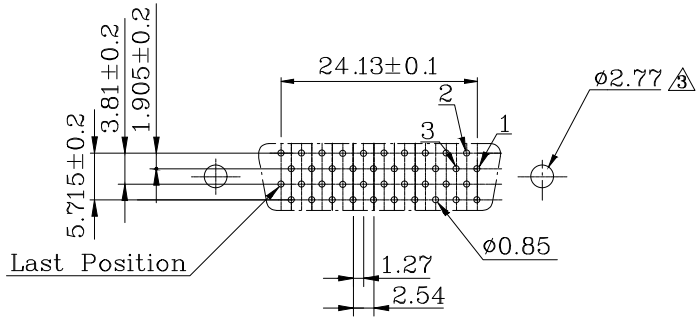

PCB Layout

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: −25°C ~ +85°C

PART NO:

B02−040811EC−2X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	

SIDE	DATE	DESCRIPTION	APPROVER
⚠	2012/08/22	NEW ISSUE	JINGLI

QUALITY SYMBOLS

□: CRITICAL ⊠: MAJOR

▽: ZERO DEFECT ▽: S.P.C

Toleance	
x.	±0.50
.x	±0.30
.xx	±0.25

NAME:	SCSI PIN TYPE 40P F 180° DIP (客户用图)				PART NO.	B02-040811EC-2X	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2012/08/22	JINGLI	KING ZHOU		B02-018

Lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769−85181660 85181770