





L Type



S Type

Thread Hole
(2 Places)

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

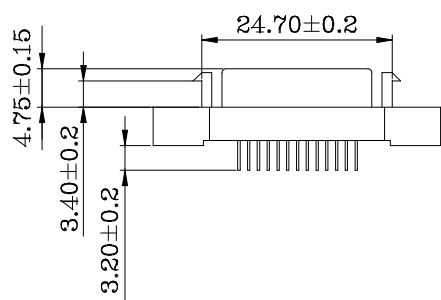


PART NO:
B02-026818EC-1X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

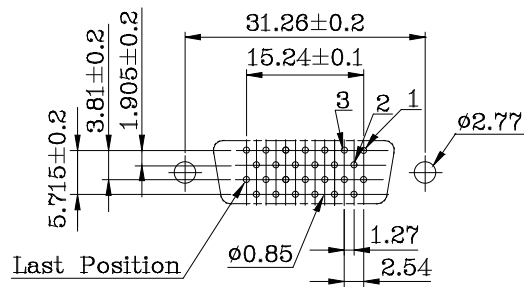

PCB Layout (A2)

3	HOUSING	PBT+30%GF	COLOR:BLACK
2	SHELL	ZINC ALLOY	PLATING:Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni
ITEM	DESC.	MATERIAL	REMARKS

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

.x ±0.50
.x ±0.30
.xx ±0.25

NAME:

SCSI PIN TYPE 26P F 180° DIP
(客户用图)

PART NO.

B02-026818EC-1X

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1


DATE:

2008/07/04

JACK CHEN

DEAN FAN

B02-001



lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770

△	2008/07/04	NEW ISSUE	JACK CHEN
SIDE	DATE	DESCRIPTION	APPROVER