


A

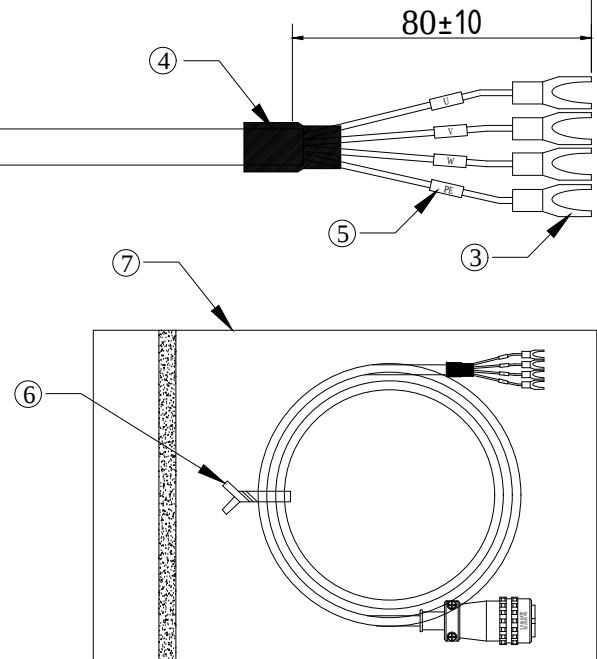

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

	NAME:		低功率0.75MM²*4C动力线 XS16K4TP (客户用图)			PART NO.	A01-0046X XXX-04	
公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. A01-005
±50								
±100	SCALE:	NONE	DATE:	2018/12/28	Jing Li	Jack Chen		
±150								
	lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		

				QUALITY SYMBOLS	Tolerance		NAME:		低功率0.75MM²*4C动力线 XS16K4TP (客户用图)		PART NO.	A01-0046X XXX-04			
				□: ☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
					300~2000	±50									
△	2018/12/28	FIRST ISSUE		JING LI	CRITICAL	MAJOR	2001~5000	±100	SCALE:	NONE	DATE:	2018/12/28	Jing Li	Jack Chen	A01-005
				▽: ▽:	5001~	±150									
SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT	S.P.C	 		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770						
8		7		6		5		4		3		2		1	