



RoHS

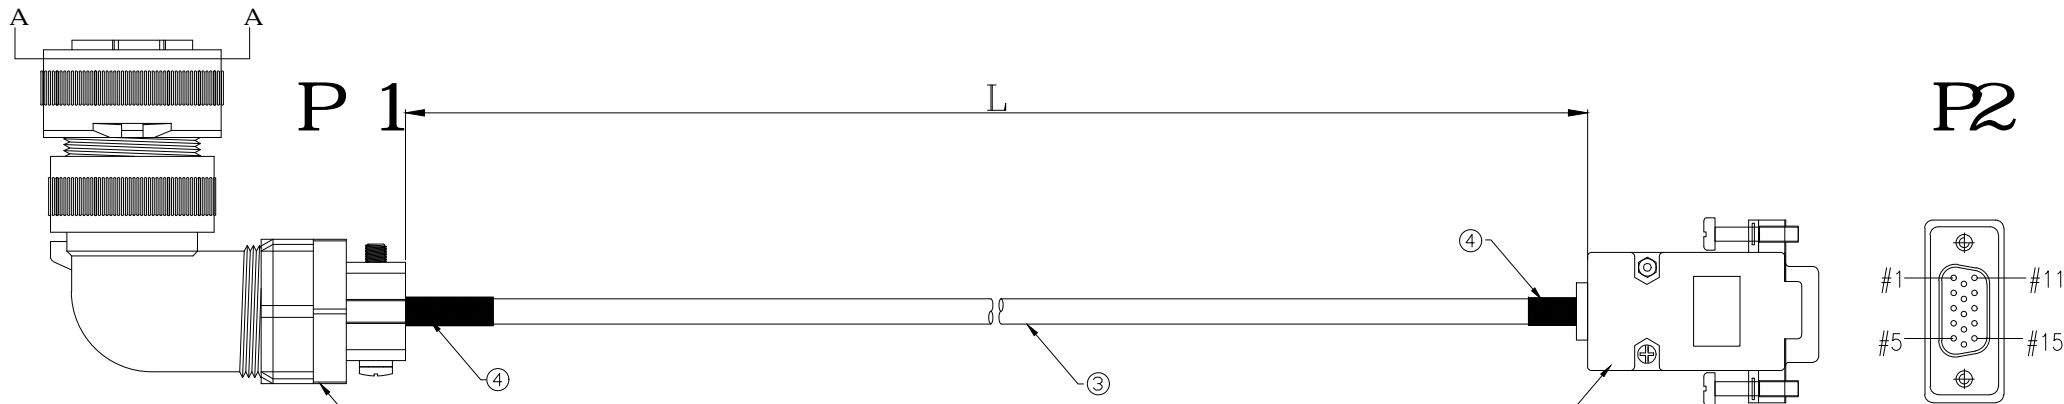

PIN ASSIGNMENT

P 1		P 2	
PLUG 15P	COLOR	HDB 15P Male	
11	RED SPOT.	1	
12	RED	2	
7	YELLOW SPOT.	3	
4	YELLOW	4	
2	BLUE SPOT.	5	
10	BLUE	6	
14	GREEN SPOT.	7	
15	GREEN	8	
8	BROWN SPOT.	9	
5	BROWN	10	
13	ORANGE SPOT.	11	
3	ORANGE	12	
9	BLACK SPOT.	13	
6	BLACK	14	
1	DRAIN	15	

PART NO.:

A01-0066X XXX-01

COLOR:

1: BLACK

3: GREEN

LENGTH:

010:1m

100:10m

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

4	TUBE	黑色套管 Tube $\phi 8.5\text{mm} \times 50\text{mm}$	2PCS
3	CABLE	7P*0.15mm ² +ADB高柔线, OD:8.0mm, Jacket:PVC, Color:See Part NO.	1PCS
2	CONNECTOR	HD. DB 15Pin Male Solder Assembly, Housing Black, Plastic Hood: Black, Short screw.	1SET
1	CONNECTOR	Aviation Female, Assembled Type, YD28 15P	1SET
	ITEM	PART NAME	DESCRIPRION
			QY' T

△			
△			
△	2018/01/12	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	Tolerance		NAME:	中功率14芯伺服编码器线(YD28 15P母)				PART NO.	A02-0156X XXX-01		
□: ☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2018/01/12	Jing Li	Jack Chen		A02-001	
▽: ▽:	2001~5000	±100	东莞市林诚塑胶电子有限公司 http://www.lineconn.com ZERO DEFECT S.P.C TEL:0769-85181660 85181770								
	5001~	±150									