

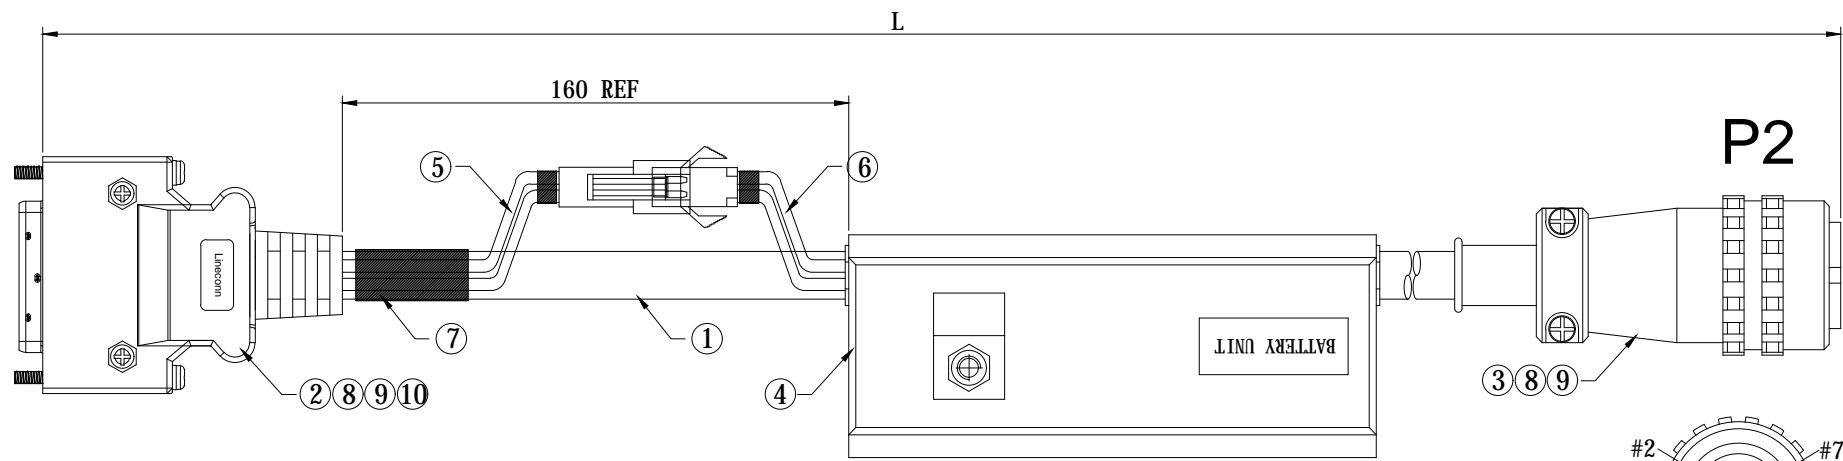


RoHS

P1



### PIN ASSIGNMENT

SCSI CN 26P/M	WIRE COLOR	PLUG 7P	BATTERY UNIT
26	BRAID	1	
/	BLACK	2	" - "
/	RED	3	" + "
2	BROWN	4	
20	YELLOW	5	
1	ORANGE	6	
14	RED/WHITE	7	

PART NO.: A02-0266X XXX-01  
 COLOR: \_\_\_\_\_  
 1: BLACK  
 3: GREEN  
 LENGTH: \_\_\_\_\_  
 010:1m  
 100:10m

- NOTES:
- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
  - CONDUCTOR RESISTANCE: 5 OHMS MAX.
  - INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
  - THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QY'T
12	PE BAG	PE BAG,T=0.04mm,W100*L330mm	1PCS
11	MNI TIE	BLACK MNI TIE, L=120MM	1PCS
10	TUBE	BLACK TUBEØ1.5*22MM COLOR:BLACK	1PCS
9	TUBE	BLACK TUBEØ1.5*12MM COLOR:BLACK	3PCS
8	TUBE	BLACK TUBEØ1.5*8MM COLOR:BLACK	12PCS
7	TUBE	BLACK TUBEØ8.0*60MM COLOR:BLACK	1PCS
6	CABLE3	SM2.54 2P FEMALE WIRE HARNESS, COLOR:BLACK	1PCS
5	CABLE2	SM2.54 2P MALE WIRE HARNESS COLOR:BLACK	1PCS
4	BATTERY	BATTERY UNIT, COLOR: BLACK	1SET
3	CONN	Aviation PLUG 7P FEMALE, Assembled TYPE, 180 degrees. MDEL: XS16K7TP.	1SET
2	CONN	SCSI CN 26P male solder ASS'Y TYPE, Black insulation, SHELL COLOR: BLACK SCREW LENGTH: 33. 2mm	1SET
1	CABLE1	UL2464 24AWG*4P+24AWG*1C+ABD高柔线 , JACKET:PVC COLOR: BLACK, OD= 6. 5mm	NA

				QUALITY SYMBOLS	Tolerance		NAME: XCSI 26P MALE TO PLUG 7P带电池盒伺服编码器线 XS16K7TP (客户用图)				PART NO. A02-0266X XXX-01	
				□: □:	尺寸(MM)	公差(MM)	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	300~2000	±50	SCALE: NONE	DATE: 2019/01/07	Jing Li	Jack Chen		A02-002
△	2019/01/07	FIRST ISSUE	JING LI	▽: ▽:	2001~5000	±100	东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770					
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	5001~	±150						