


RoHS

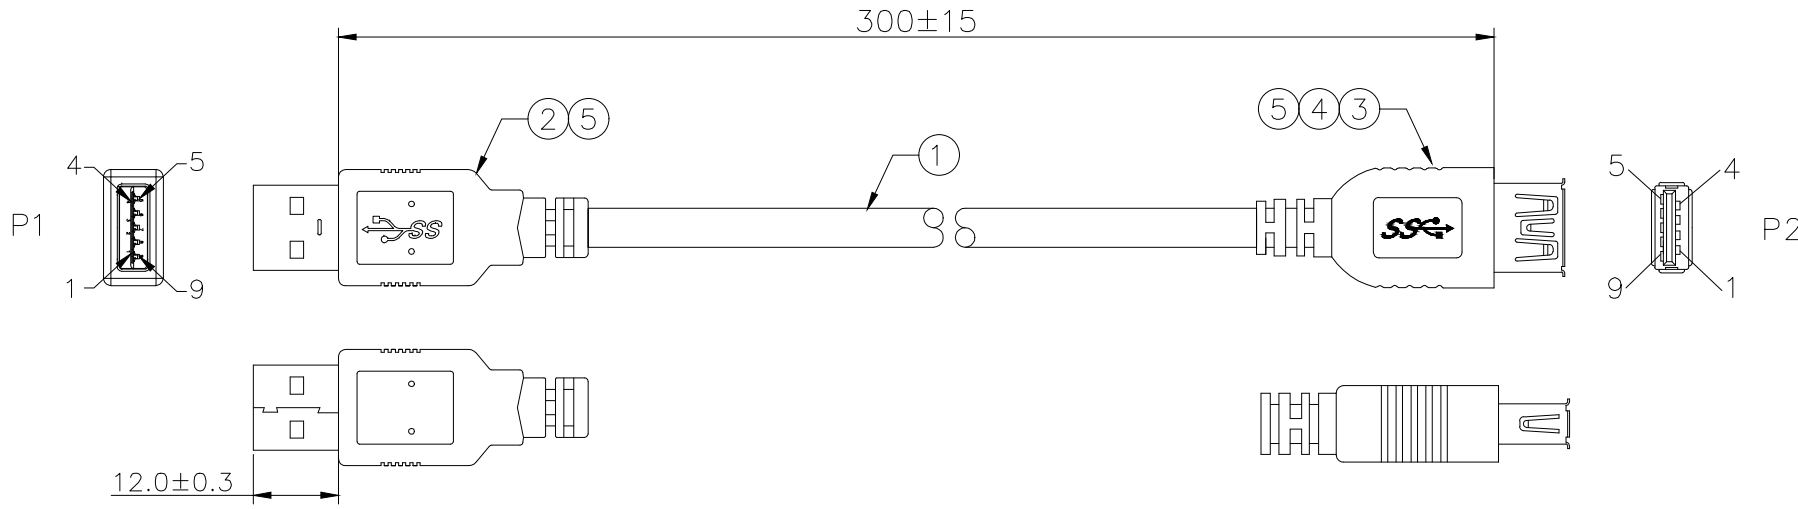

PIN OUT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN	7
8	PURPLE	8
9	ORANGE	9
SHELL	DRAIN+BRAID	SHELL

NOTE:
 1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

PART NO.:
 COLOR: A12-0093X XXX-A0
 1: BLACK
 6: BLUE
 LENGTH:
 010:1m
 100:10m

5	PE	LD-PE		
4	PVC	35P BLUE PVC		
3	CONN. 2	USB3.0 A TYPE FEMALE BLUE SHEEL NI-PLATED PIN/GF		1PC
2	CONN. 1	USB(3.0) A TYPE 公頭 藍膠 PIN鍍G/F 鐵殼鍍鎳 三件式		1SET
1	CABLE	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+ +AEB(AL) OD: 5.5MM		/
NO.	MATERIAL	DESCRIPTION	Q'TY	VENDOR

			QUALITY SYMBOLS
			□: ☒: △: ▽: ⊕: ⊖: ⊕: ⊖:
△	2017/04/12	FIRST ISSUE	JING LI
SIDE	DATE	DESCRIPTION	APPROVER

Tolerance		NAME: USB 3.0 AM TO AF半包		PART NO. A12-0093X XXX-A0	
尺寸(MM)	公差(MM)	REV: A	UNIT: mm	DRW BY: Jing Li	CHK BY: Jack Chen
300~2000	±50	SCALE: NONE	DATE: 2017/04/12	APP BY:	DRAWING NO. A12-010
2001~5000	±100	lineconn 东莞市林诚塑胶电子有限公司			
5001~	±150	http://www.lineconn.com			
				TEL:0769-85181660 85181770	