RoHS

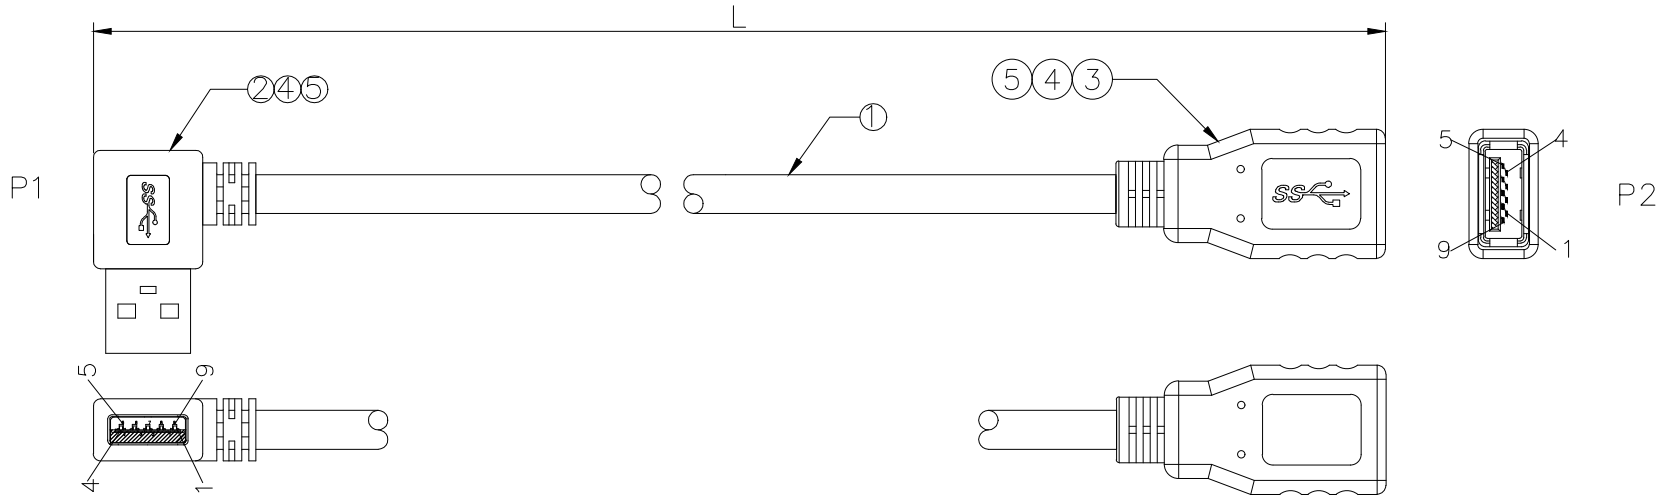

PIN OUT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN	7
8	PURPLE	8
9	ORANGE	9
SHELL	DRAIN+BRAID	SHELL

NOTE:
1.100% OPEN & SHORT WIRE TEST;
2.CONTACT RESISTANCE 2ohm Max;
3.INSULATION RESISTANCE 10M ohm Min;
4.HI-POT DC 300V;

PART NO.: A12-0093X XXX-AC

COLOR:
1: BLACK
6: BLUE

LENGTH:
010:1m
100:10m

NO.	MATERIAL	DESCRIPTION	Q'TY	VENDOR
5	PE	LD-PE		
4	PVC	35P BLUE PVC		
3	CONN.2	USB3.0 A TYPE FEMALE BLUE SHEEL NI-PLATED PIN/GF	1PC	
2	CONN.1	USB3.0 A TYPE MALE BLUE SHEEL NI-PLATED PIN/GF	1SET	
1	CABLE	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+ +AEB(AL) OD:5.5MM	/	

SIDE	DATE	DESCRIPTION	APPROVER
⚠	2017/04/12	FIRST ISSUE	JING LI

QUALITY SYMBOLS
□: CRITICAL ☒: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance	
尺寸(MM)	公差(MM)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	USB 3.0 AM 90° 镰刀型 TO AF全包 (客户用图)					PART NO.	A12-0093X XXX-AC	
REV:	A	UNIT:	mm	DRW BY		CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2017/04/12	Jing Li		Jack Chen		A12-009

Lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770