


RoHS

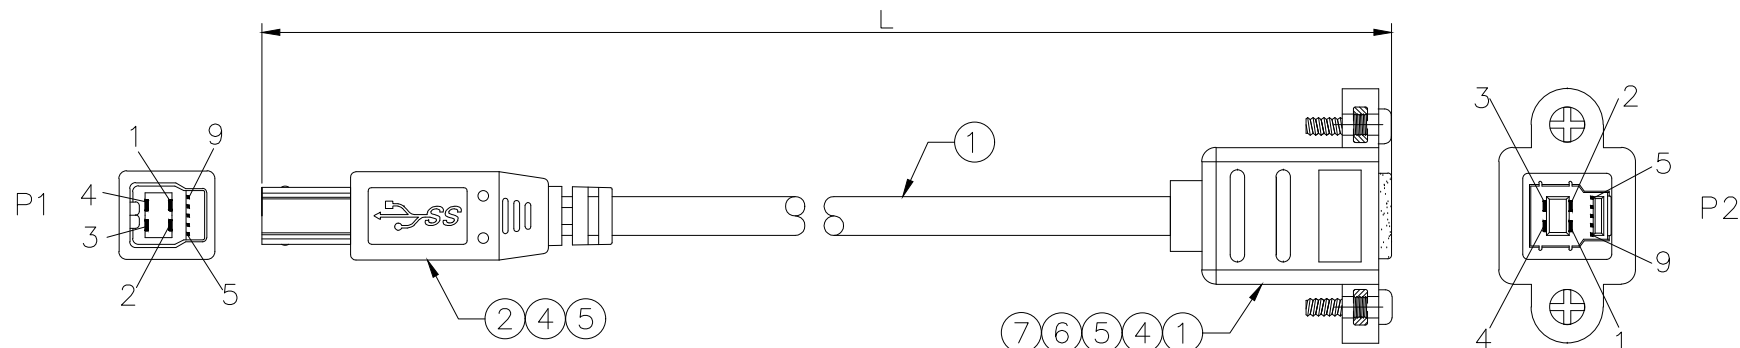

PIN OUT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN	7
8	PURPLE	8
9	ORANGE	9
SHELL	DRAIN+BRAID	SHELL

PART NO.:  
 COLOR: A12-0093X XXX-BB  
 1: BLACK  
 6: BLUE  
 LENGTH:  
 010:1m  
 100:10m

NOTE:  
 1. 100% OPEN & SHORT WIRE TEST;  
 2. CONTACT RESISTANCE 2ohm Max;  
 3. INSULATION RESISTANCE 10M ohm Min;  
 4. HI-POT DC 300V;

7	NUT	六角螺母 4.75*2MM #4-40UNC 鍍鎳	2PC
6	SCREW	螺絲 5*10MM #4-40UNC 鍍鎳 十字頭	2PC
5	PE	LD-PE	
4	PVC	35P BLUE PVC	
3	CONN. 2	USB(3.0) B TYPE 母頭 藍膠 PIN鍍G/F, 鐵殼鍍鎳 焊線式	1PC
2	CONN. 1	USB(3.0) B TYPE 公頭 藍膠 PIN鍍G/F, 鐵殼鍍鎳 三件式	1SET
1	CABLE	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+ +AEB(AL) OD: 5.5MM	/
NO.	MATERIAL	DESCRIPTION	Q'TY

△	2017/05/19	FIRST ISSUE	JING LI
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME: USB 3.0 BM TO BF #4-40螺母 (客户用图)		PART NO. A12-0093X XXX-BB	
□:	☒:	尺寸(MM)	公差(MM)	REV: A	UNIT: mm	DRW BY: Jing Li	CHK BY: Jack Chen
CRITICAL	MAJOR	300~2000	±50	SCALE: NONE	DATE: 2017/05/19	APP BY:	DRAWING NO. A12-010
▽:	▽:	2001~5000	±100	东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770			
ZERO DEFECT	S.P.C	5001~	±150				