


**ELECTRICAL:**

- Current Rating: 1 Amp
- Insulation Resistance: 100M $\Omega$ /Min
- Withstanding Voltage: 250V AC/Min
- Contact Resistance: 50m $\Omega$  Max
- Temperature Range: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C

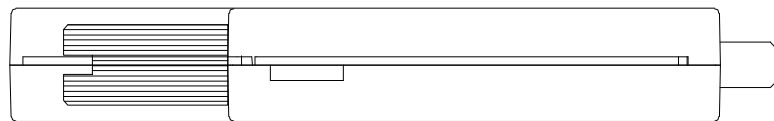


6	JACKSCREWS	STEEL	PLATING:Ni	
5	CABLE CLIPPER	STEEL	PLATING:Ni	
4	BACK SHELL	ZINC ALLOY	PLATING:Ni	
3	HOUSING	LCP+30%GF	COLOR:BEIGE	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	COPPER ALLOY T=0.3mm	CONTACT AREA:G/F SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

□:    ☒:    CRITICAL    MAJOR  
 ∇:    ∇:    ZERO DEFECT    S.P.C

Tolerance

x.    ±0.50  
 .x    ±0.30  
 .xx    ±0.25



NAME:

CISCO 26P PITCH 1.0mm MALE SOLDER ASSEMBLY  
 TYPE (客户用图)

REV:

A

UNIT:

mm

DRW BY:

JACK CHEN

CHK BY:

KING ZHOU

APP BY:

SCALE:

N:1

DATE:

2014/09/23

DRW BY:

JACK CHEN

CHK BY:

KING ZHOU

APP BY:

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com  
 TEL:0769-85181660 85181770

△	2014/09/23	NEW ISSUE	JACK CHEN	
SIDE	DATE	DESCRIPTION	APPROVER	

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1