

Voltage Current Rating: 1 AMP. 30V AC
Dielectric Withstanding Voltage: 500V AC
 Contact Resistance: 35 mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Temperature Range: -20°C to +85°C

PART NO.:


B03-068618X7-01

CONTACT AREA:

A:G/F

C:Au 3u"

H:Au 15u"

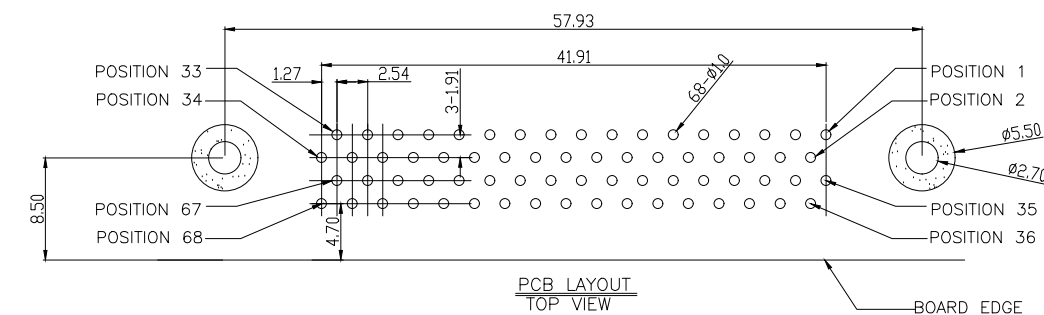

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
5	BRACKET	STEEL	PLATING: Ni	
4	COVER	LCP+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	ZINC ALLOY	PLATING: Ni	
1	TERMINAL	COPPER ALLOY T=0.3mm	CONTACT AREA: SEE NOTE SOLDER AREA: Sn UNDER-PLATING: Ni	

△			
△			
△	2015/05/12新版发行	Jack Chen	
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.80
CRITICAL	MAJOR	.x	±0.50
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SCSI 68P FEMALE 90度DIP 锌合金壳 (客户用图)			PART NO.		B03-068618X7-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/05/12	Jing Li	Jack Chen		B03-006	
Lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com				
				TEL:0769-85181660 85181770				