

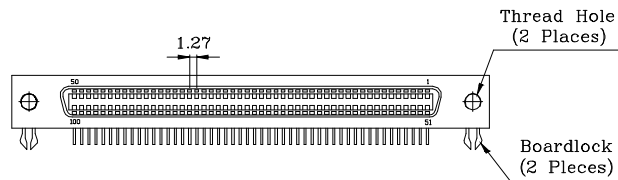

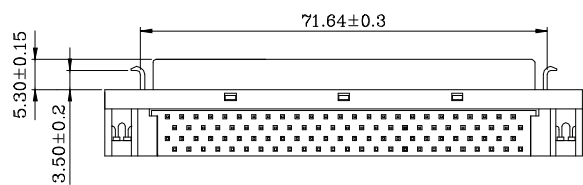
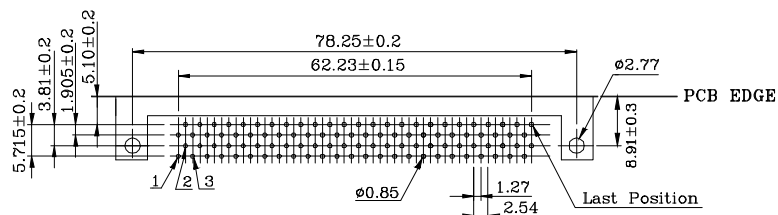


L Type



S Type



PCB Layout

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO:  
B03-100611EB-0X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET


6	BOARDLOCK	COPPER ALLOY	PLATING:Ti	
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□ :    ☒ :  
CRITICAL MAJOR  
▽ :    ▽ :  
ZERO DEFECT S.P.C

Tolerance

x.    ±0.50  
.x    ±0.30  
.xx   ±0.25



NAME:

SCSI 100P FEMALE 90度 DIP  
(客户用图)

REV:

A    UNIT: mm    DRW BY

SCALE:

N:1    DATE: 2010/10/11    JINGLI

lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com  
TEL:0769-85181660 85181770

△	2010/10/11	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

PART NO.		B03-100611EB-0X	
REV:	A	UNIT:	mm
DRW BY:	JINGLI	CHK BY:	KING ZHOU
APP BY:		DRAWING NO.:	B03-014