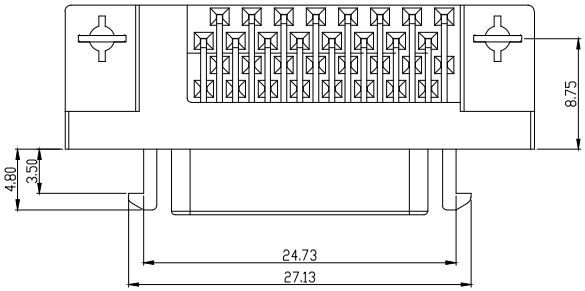

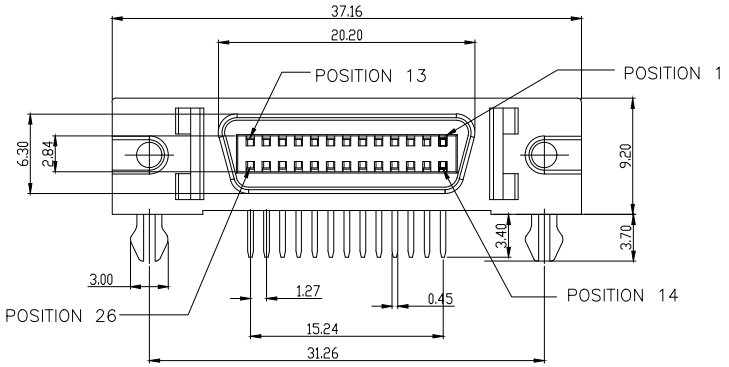



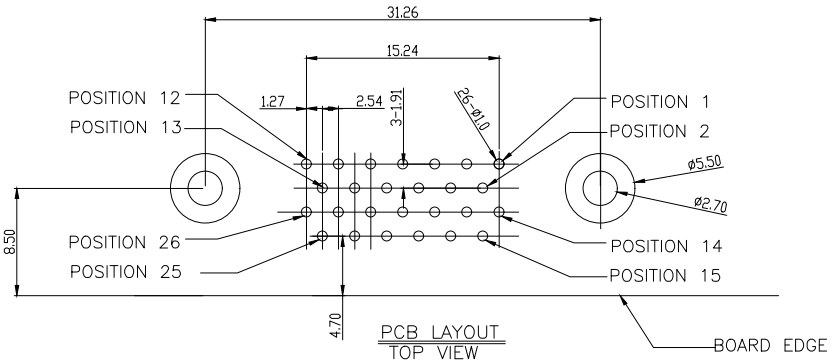

Voltage Current Rating:1 AMP.30V AC
Dielectric Withstanding Voltage:500V AC
Contact Resistance:35 mΩ Max.
Insulation Resistance:500MΩ Min.
Temperature Range:-20℃ to +85℃

PART NO.:

B03-026618X7-01

└ CONTACT AREA:
A:G/F
C:Au 3u"
H:Au 15u"

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
5	BRACKET	STEEL	PLATING:Ni	
4	COVER	LCP+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	ZINC ALLOY	PLATING:Ni	
1	TERMINAL	COPPER ALLOY T=0.3mm	CONTACT AREA:SEE NOTE SOLDER AREA:Sn UNDER-PLATING:Ni	

SIDE	DATE	DESCRIPTION	APPROVER
3			
2			
1	2015/04/09	新版发行	King Zhou

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance
x. ±0.80
.x ±0.50
.xx ±0.25

NAME:	SCSI 26P FEMALE 90度DIP 锌合金壳 (客户用图)				PART NO.	B03-026618X7-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/04/09	DAWN HU	KING ZHOU		B03-003	

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770