


RoHS

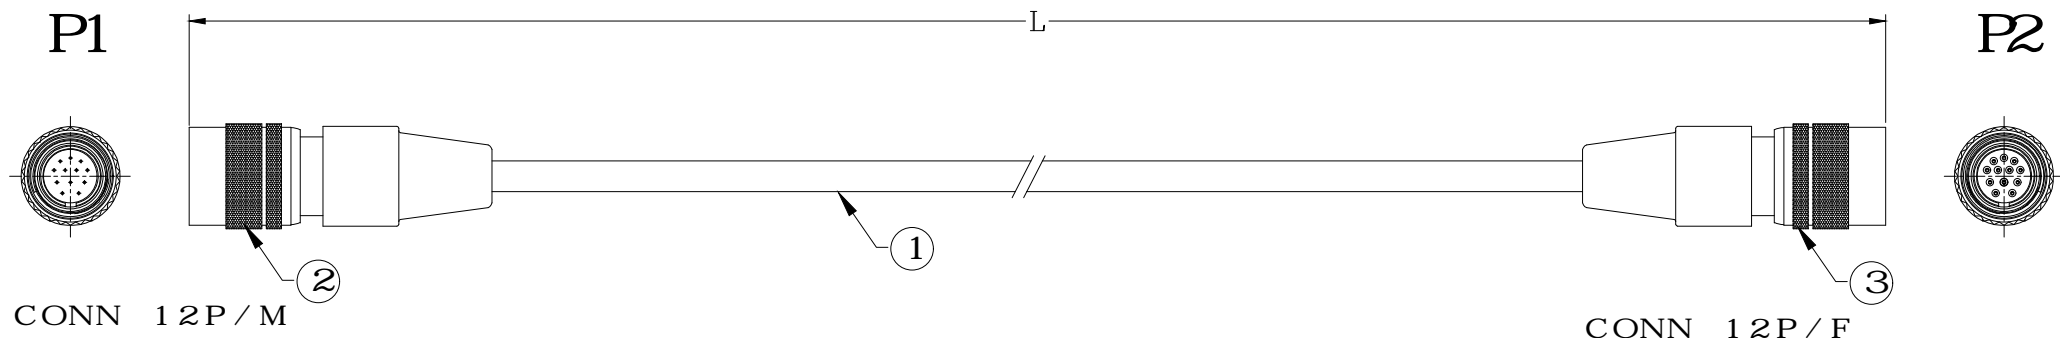

CONNECTION

P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	YELLOW	4
5	GREEN	5
6	PURPLE	6
7	GRAY	7
8	WHITE	8
9	BLUE	9
10	PINK	10
11	ORANGE	11
12	WHITE/GREEN	12
	BRAID	
	SHELL	SHELL

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 10M OHMS MIN, AC 500V 0.01sec.
4. INSTANT BREAK :3 SECONDS.
5. THE DIMENSIONS MUST MEET THE SURFACE REQUIREMENTS..
6. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.
7. APPEARANCE OF NO DIRT, DAMAGE, SCRATCH, DEFORMATION AND OTHER UNDESIRABLE PHENOMENA.

3	CONN	AVIATION 12P CONNECTOR,FEMALE	1SET
2	CONN	AVIATION 12P CONNECTOR,MALE	1SET
1	CABLE	UL20276 26AWGx12C+AL+B,ØD8.0 BLACK	NA
ITEM	PART NAME	DESCRIPTION	QY'T

△				QUALITY SYMBOLS	Tolerance		NAME:	工业相机电源线Analog (客户用图)			PART NO.	A10-01231XXX-01		
△				□: ☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2018/09/11	新版发行		CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2018/09/11	Jing Li	Jack Chen		A10-006
△				▽: ▽:	2001~5000	±100								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	5001~	±150	lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770				