



L Type

S Type


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

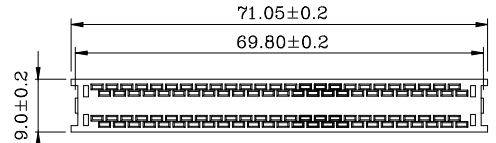

Termination Cover  
(1 Places)



Wire Holder  
(2 Places)



PART NO: B02-100211EC-X X

WIRE HOLDER:  
28AWG or 30AWG WIRE  
6= 0.62mm  
7= 0.75mm  
9= 0.90mm

BRACKET FINISHES:  
L:LATCH BRACKET  
S:SCREW BRACKET


4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS  
□:      ☒:      CRITICAL    MAJOR  
▽:      ▽:      ZERO DEFECT    S.P.C

Tolerance	
.x	±0.50
.x	±0.30
.xx	±0.25

NAME:		SCSI PIN TYPE 100P FEMALE IDC刺破式 (客户用图)			PART NO.	<b>B02-100211EC-X X</b>		
REV:	<b>A</b>	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	<b>2011/07/13</b>	Jack Chen	Dean Fan		<b>B02-021</b>	

△	2011/07/13	NEW ISSUE	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER



lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>  
TEL: 0769-85181660 85181770