


L TYPE

S TYPE

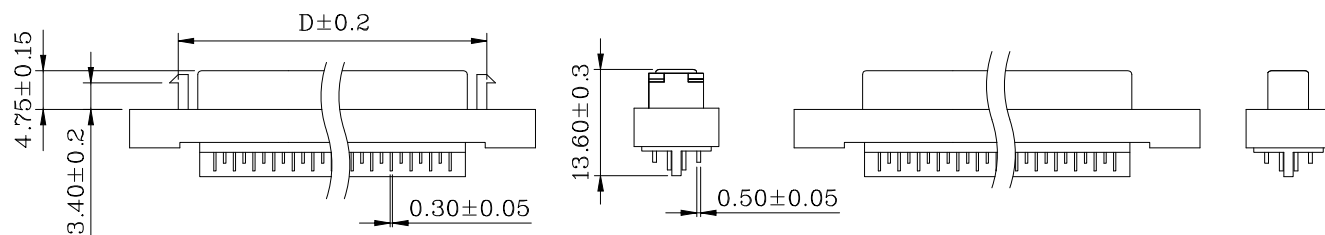

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B02-0XX418EC-0X

No. OF CONTACTS:   
 26= 26P   
 36= 36P   
 50= 50P   
 68= 68P

BRACKET FINISHES:   
 L:LATCH BRACKET   
 S:SCREW BRACKET

Dimensions:

No. of contacts:	A	B	C	D
26	37.20	31.26	19.45	24.70
36	43.50	37.60	25.80	31.00
50	52.60	46.50	34.70	40.10
68	64.00	57.95	46.20	50.90

4	COVER	PBT+30%GF	COLOR:BLACK
3	HOUSING	PBT+30%GF	COLOR:BLACK
2	SHELL	ZINC ALLOY	PLATING:Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni
ITEM	DESC.	MATERIAL	REMARKS

		QUALITY SYMBOLS		Tolerance		NAME: SCSI PIN TYPE FEMALE SOLDER (客户用图)			PART NO. B02-0XX418EC-0X				
		□:	☒:	x.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
		CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2011/06/11	JINGLI	KING ZHOU		B02-020
		▽:	▽:	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL: 0769-85181660 85181770				
SIDE	DATE	DESCRIPTION		APPROVER									