

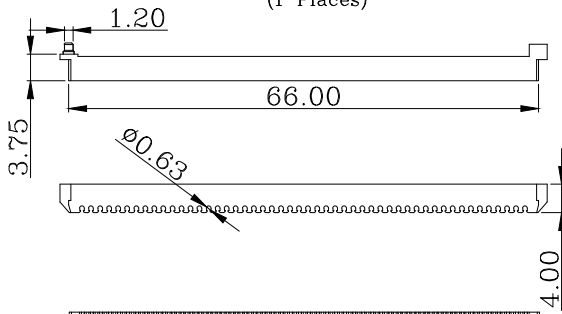


Termination Cover  
(1 Places)

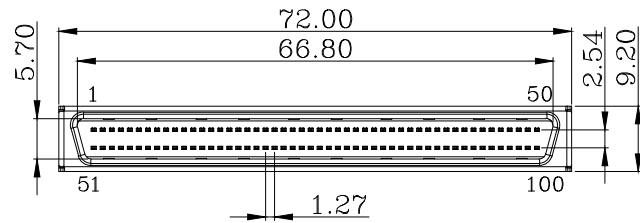


Wire Holder  
(2 Places)

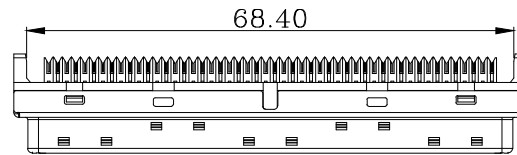

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Operation Temperature: -25°C ~ +85°C

PART NO: B02-100111C0-X1

WIRE HOLDER:  
28AWG or 30AWG WIRE  
6= 0.62mm  
7= 0.75mm  
9= 0.90mm



4	COVER	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

△				QUALITY SYMBOLS
△				□:    ☒:
△	2014/10/17	新版发行	King Zhou	CRITICAL    MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	▽:    ▽: ZERO DEFECT    S.P.C

Tolerance		NAME:	SCSI PIN TYPE 100P MALE IDC刺破式 ASSEMBLY CONN. (客户用图)			PART NO.	B02-100111C0-X1		
.x	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
.x	±0.50	SCALE:	N:1	DATE:	2014/10/17	JACK CHEN	DEAN FAN		B02-050
.xx	±0.30	<b>东莞市林诚塑胶电子有限公司</b>							

http://www.lineconn.com			
TEL:0769-85181660 85181770			

8 7 6 5 4 3 2 1

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

8 7 6 5 4 3 2 1