


• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: 500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -25°C ~ +85°C

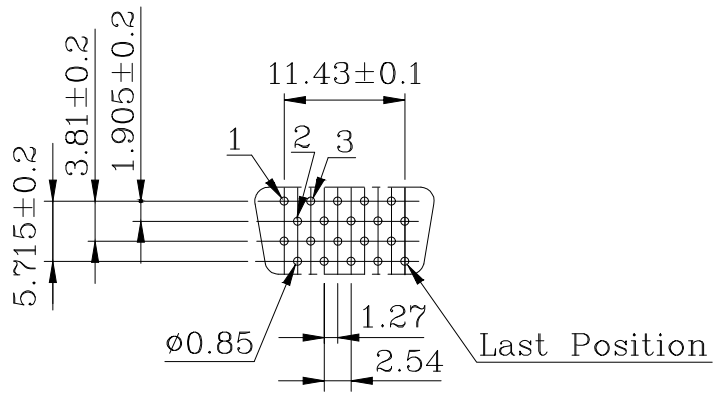

PCB Layout

3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK
2	SHELL	SPCC	PLATING: Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni
ITEM	DESC.	MATERIAL	REMAKS

△				QUALITY SYMBOLS
△				□:      ⊠:
△	2016/07/19	新版发行	King Zhou	CRITICAL    MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT    S.P.C

Tolerance		NAME:		SCSI PIN TYPE 20P MALE 180° DIP (客户用图)				PART NO.		B02-020711EN-10	
x.	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
.x	±0.50	SCALE:	N:1	DATE:	2016/07/19	JACK CHEN	DEAN FAN		B02-053		
.xx	±0.30	东莞市林诚塑胶电子有限公司				<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770					