

Dimensions:



No. of contacts:	A	B	C
26	24.00	19.65	9.30
36	30.40	25.96	8.50
40	32.95	28.50	9.30
50	39.30	34.85	9.30
68	50.70	46.35	9.30
100	71.05	66.88	9.30

- ELECTRICAL CHARACTERISTICS
 - Contact Current Rating: 1 Amp
 - Dielectric Withstanding Voltage: 500V AC
 - Insulation Resistance: 500MΩ/Min
 - Contact Resistance: 35mΩ/Max
 - Operation Temperature: -25°C ~ +85°C

PART NO: B02-0XXG11E0-X1

No. OF CONTACTS:
 14= 14P
 20= 20P
 >
 100=100P

PCB MOUNTING:
 A:1.0mm(For PCB 1.2mm)
 B:1.4mm(For PCB 1.6mm)

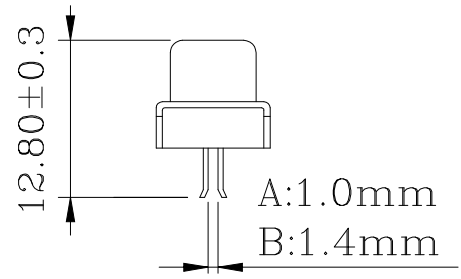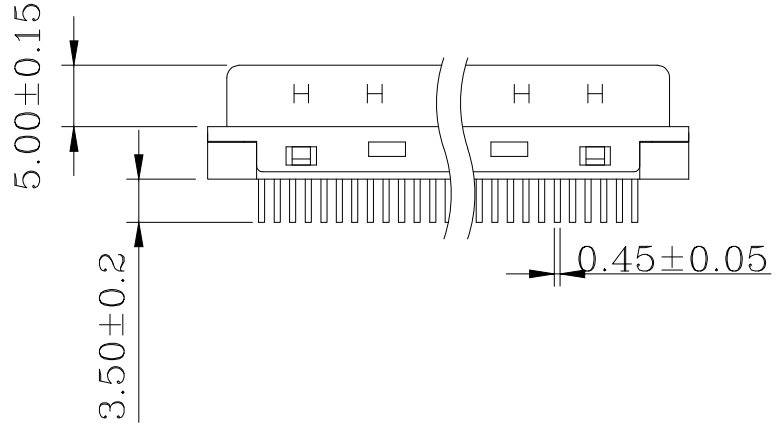

3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK
2	SHELL	SPCC	PLATING: Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni
ITEM	DESC.	MATERIAL	REMAKS

△			
△			
△	2016/08/04新版发行	King Zhou	
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	Tolerance	NAME:	SCSI PIN TYPE MALE夹板组装式 (客户用图)				PART NO.	B02-0XXG11E0-X1		
□: ☒:	x. ±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
CRITICAL MAJOR	.x ±0.50	SCALE:	N:1	DATE:	2016/08/04	JACK CHEN	DEAN FAN		B02-064	
▽: ▽:	.xx ±0.30	东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770				
ZERO DEFECT S.P.C										