

PART NO.:

B03-0263X1X2-X1

COLOR:

1:BLACK

C:BEIGE

CONTACT AREA:

A:G/F

E:Au 5u"

H:Au 15u"

HOOD OD :

7:7.0mm

8:8.0mm

B:8.5mm Δ

9:9.0mm





Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 500M Ω /Min

Contact Resistance: 35m Ω /Max

Operation Temperature: -25°C ~ +85°C

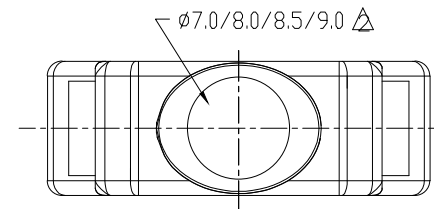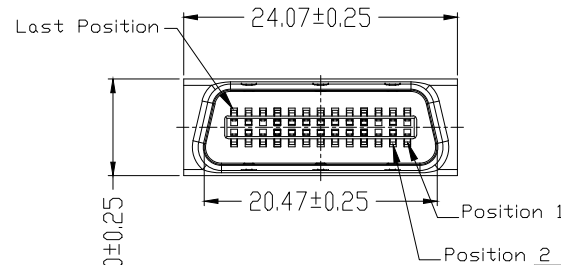

6	SHRAPNEL	SUS		
5	OUTSIDE SHEEL	SPCC	PLATING:Ni	
4	HOOD&WRENCH	ABS+G.F.30% (UL 94V-0)	COLOR:SEE P/N	
3	HOUSING&COVER	PBT+G.F.30% (UL 94V-0)	COLOR:BLACK	
2	SHEEL	SPCC	PLATING:Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:P/N SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

Δ

Δ

Δ

SIDE

QUALITY SYMBOLS

\square : \boxtimes :
CRITICAL MAJOR
 ∇ : ∇ :
ZERO DEFECT S.P.C

Tolerance

.x. ± 0.80
.x. ± 0.50
.xx ± 0.30

NAME:

SCSI 26P MALE 焊线塑壳装配式鱼钩弹片 (客户用图)

REV:

B

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2009/04/02

JACK CHEN

KING ZHOU

B03-030

lineconn

东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>

TEL:0769-85181660 85181770

A

A