
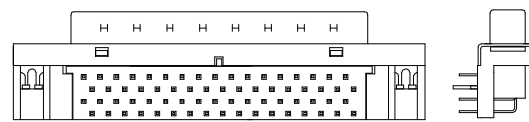
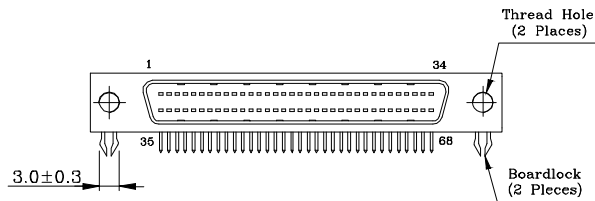


L Type



S Type


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO:
B02-068511EC-0X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

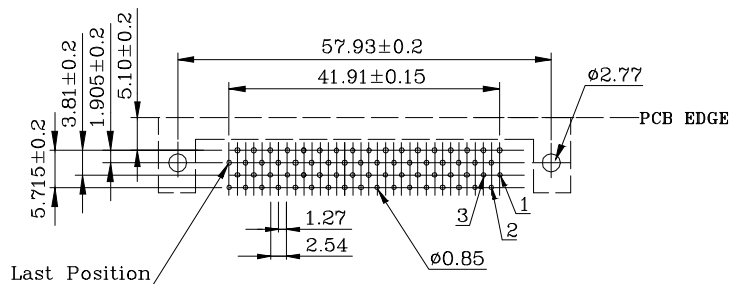

PCB Layout

6	BOARDLOCK	COPPER ALLOY	PLATING:TiN	
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	LCP+30%GF	COLOR:BLACK	
3	HOUSING	LCP+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25

NAME:

SCSI PIN TYPE 68P MALE 90度 DIP
(客户用图)

PART NO.

B02-068511EC-0X

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1


DATE:

2015/06/03

JINGLI

KING ZHOU

B02-052



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770



2015/06/03

NEW ISSUE

JINGLI

SIDE

8

DATE

DESCRIPTION


7

APPROVER

6

ZERO DEFECT S.P.C

5



4

lineconn 东莞市林诚塑胶电子有限公司

3

http://www.lineconn.com
TEL:0769-85181660 85181770

2

1