


SECTION:A-A

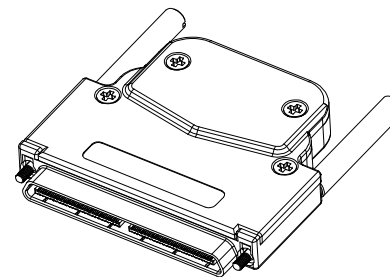

ELECTRICAL:

- Current Rating: 2 Amp
- Insulation Resistance: 100MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 50mΩ Max
- Temperature Range: -25°C ~ +85°C


ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
5	JACKSCREWS	STEEL	PLATING: Ni	
4	CABLE CLIPPER	STEEL	PLATING: Ni	
3	BACK SHELL	ZINC ALLOY	PLATING: Ni	
2	HOUSING	LCP+30%GF	COLOR: BLACK	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	

QUALITY SYMBOLS

□ : ☒ :
CRITICAL MAJOR
▽ : ▽ :
ZERO DEFECT S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25



NAME:

VHDCI 100P MALE SOLDER ASSEMBLY TYPE
(客户用图)

REV: A

SCALE: N:1

UNIT: mm

DATE: 2018/08/10

DRW BY: JACK CHEN

CHK BY: KING ZHOU

lineconn 东莞市林诚塑胶电子有限公司

PART NO. B06-100318AA-01

APP BY

DRAWING NO. B06-017

http://www.lineconn.com
TEL: 0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
△	2018/08/10	NEW ISSUE	JACK CHEN