

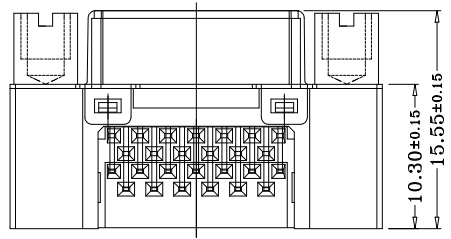



P. C. B. LAYOUT

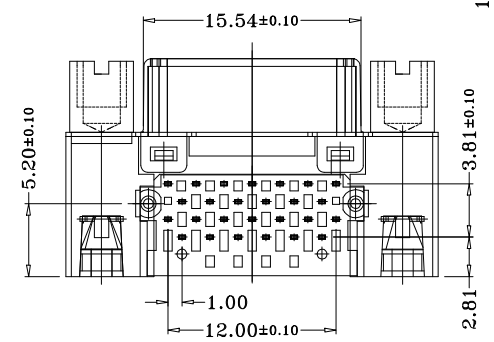

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

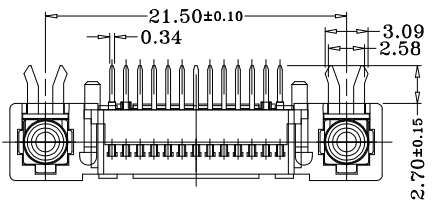

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
7	SCREW	COPPER ALLOY	PLATING:Ni	
6	BOARDLOCK	COPPER ALLOY	PLATING:Ti	
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	LCP+30%GF	COLOR:BEIGE	
3	HOUSING	LCP+30%GF	COLOR:BEIGE	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	

△		2005/06/08	NEW ISSUE	JINGLI	QUALITY SYMBOLS	Tolerance	NAME: CISCO(1.0mm)26P FEMALE RIBBON 90° PCB TYPE SCREW #4-40 (客户用图)				PART NO. B06-0266C1ED-01	
□:				☒:		x: ±0.50	REV: A	UNIT: mm	DRW BY: JINGLI	CHK BY: KING ZHOU	APP BY:	DRAWING NO. B06-006
CRITICAL				MAJOR		.x: ±0.30	SCALE: N:1	DATE: 2005/06/08				
▽:				▽:		.xx: ±0.25	lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com
ZERO DEFECT				S.P.C							TEL:0769-85181660 85181770	
SIDE	DATE	DESCRIPTION		APPROVER								
8	7	6		5	4		3		2		1	