






Termination Cover
(1 Places)

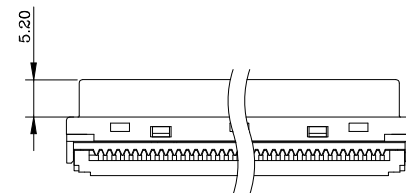

Wire Holder
(2 Places)

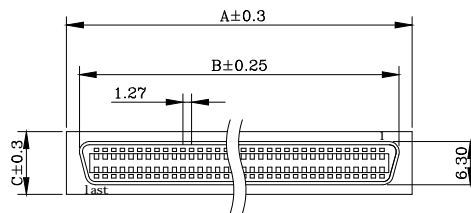

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B03-0XX211E0-X1

No.OF CONTACTS: 26= 26P
36= 36P
50= 50P
68= 68P

WIRE HOLDER: 28AWG or 30AWG WIRE
6= 0.62mm
7= 0.75mm
9= 0.90mm

Dimensions:

No.of contacts:	A	B	C	D
26	24.00	20.25	9.30	13.85
36	30.40	26.50	8.60	13.85
50	39.20	35.50	9.30	14.40
68	50.80	46.93	9.30	13.85


4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

□: CRITICAL
▽: ZERO DEFECT
☒: MAJOR
▽: S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25



NAME:

SCSI FEMALE IDC刺破装配式主体
(客户用图)

REV:

A UNIT: mm

SCALE:

N:1 DATE: 2013/12/04

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770

△	2013/12/04	NEW ISSUE	Jack Chen	
SIDE	DATE	DESCRIPTION	APPROVER	