
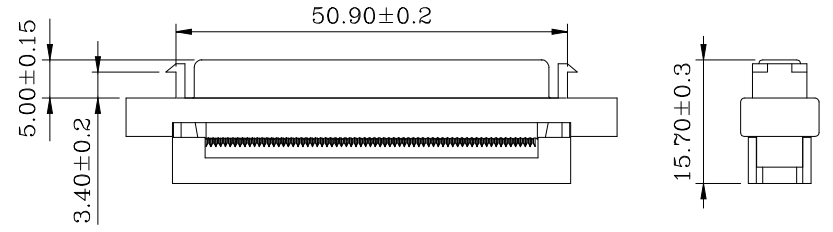


L Type


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B02-068218EC-A X



BRACKET FINISHES:  
L:LATCH BRACKET  
S:SCREW BRACKET

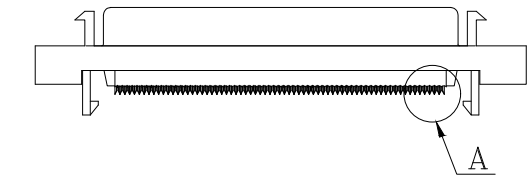

S Type

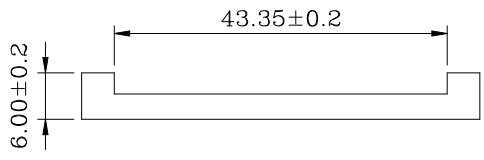

Cover

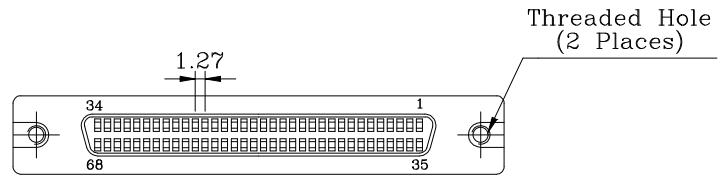

View A

4	COVER	PBT+30%GF	COLOR:BLACK
3	HOUSING	PBT+30%GF	COLOR:BLACK
2	SHELL	ZINC ALLOY	PLATING:Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni
ITEM	DESC.	MATERIAL	REMAKS

△	2011/10/19	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS  
□: CRITICAL  
▽: ZERO DEFECT  
☒: MAJOR  
▽: S.P.C

Tolerance	
x.	±0.50
.x	±0.30
.xx	±0.25

NAME:	SCSI PIN TYPE 68P FEMALE压排式 (客户用图)				PART NO.	B02-068218EC-AX		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/10/19	JINGLI	KING ZHOU	B02-036		

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>  
TEL:0769-85181660 85181770