




L Type

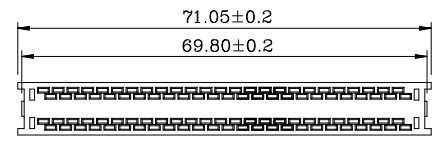

Termination Cover
(1 Places)



Wire Holder
(2 Places)



S Type

Dimensions:

No. of contacts:	A	B	C	D	E
40	46.30	40.15	28.25	33.30	13.90
100	84.18	78.23	66.45	71.50	14.40

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B02-XXX211EC-X X

No. OF CONTACTS: _____
 040= 40P
 100= 100P
 WIRE HOLDER: _____
 28AWG or 30AWG WIRE
 6= 0.62mm
 7= 0.75mm
 9= 0.90mm

BRACKET FINISHES: _____
 L:LATCH BRACKET
 S:SCREW BRACKET

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	

				QUALITY SYMBOLS	Tolerance	NAME: SCSI PIN TYPE 100P FEMALE IDC刺破式 (客户用图)				PART NO.	B02-100211EC-X X		
				□: ☒:	x. ±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.30	SCALE:	N:1	DATE:	2011/07/13	Jack Chen	Dean Fan		B02-021
				▽: ▽:	.xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司							http://www.lineconn.com
				ZERO DEFECT S.P.C			TEL:0769-85181660 85181770						
SIDE	DATE	DESCRIPTION	APPROVER										
△	2011/07/13	NEW ISSUE	Jack Chen										
8	7	6	5	4	3	2	1						