





Termination Cover  
(1 Places)

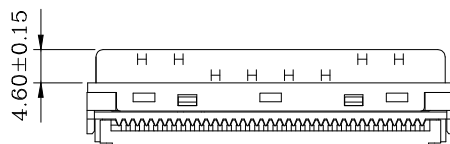

Wire Holder  
(2 Places)

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Operation Temperature: -25°C ~ +85°C


PART NO: B03-068111E0-X0

WIRE HOLDER: \_\_\_\_\_  
 28AWG or 30AWG WIRE  
 6= 0.62mm  
 7= 0.75mm  
 9= 0.90mm

4	COVER	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△				QUALITY SYMBOLS
△				□:    ☒:
△	2012/08/24 新版发行		King Zhou	CRITICAL    MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT    S.P.C

Tolerance		NAME:		SCSI 68P MALE IDC刺破式 ASSEMBLY CONN. (客户用图)			PART NO.	B03-068111E0-X0	
.x	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
.x	±0.50	SCALE:	N:1	DATE:	2012/08/24	JACK CHEN	DEAN FAN		B03-075
.xx	±0.30	lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com		TEL:0769-85181660 85181770		



8 7 6 5 4 3 2 1

F

F

E

E

D

D

C

C

B

B

A

A

8 7 6 5 4 3 2 1