


Voltage Current Rating:5 AMP.
 Dielectric Withstanding Voltage:1000V AC
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25°C to +85°C

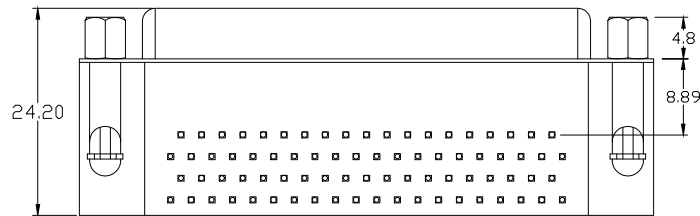


6	RIVET	COPPER ALLOY	PALTING: Ni	
5	SCREW	STEEL	PALTING: Ni	
4	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
 ▽: ▽: ZERO DEFECTS.P.C

Tolerance

.x ±0.50
 .x ±0.30
 .xx ±0.25



NAME:	HD. D-SUB 78P FEMALE 90度DIP 8.89mm 前锁4.8mm螺母 (客户用图)			PART NO.	B04-078611AD-F4		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2012/10/28	JINGLI	KING ZHOU		B04-028

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770

△	2012/10/28	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

8 7 6 5 4 3 2 1

F

E

D

C

B

A