


High Power Current Rating:10,20 or 40 AMP.
 High Power Current Resistance:2.7 Milliohms MAX.
 Dielectric Withstanding Voltage:1000V AC
 Insulation Resistance:5000M Ω Min.
 Temperature Range:-25 $^{\circ}$ C to +85 $^{\circ}$ C

PART NO: B08-5W53114N-X0

Current Rating: _____
 A = 10 AMPS Dim.A ϕ 1.70
 B = 20 AMPS Dim.A ϕ 2.80
 C = 30 AMPS Dim.A ϕ 3.30
 D = 40 AMPS Dim.A ϕ 4.60

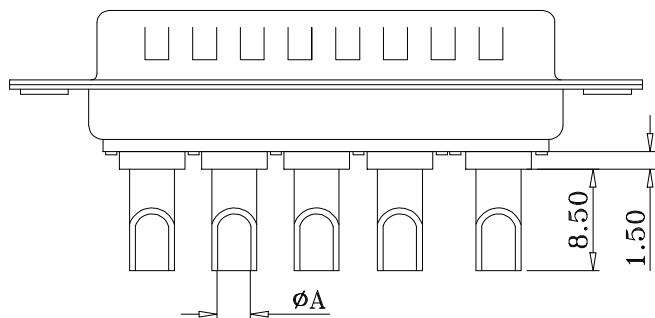

4	REAR SHELL	SPCC	PALTING:Sn	
3	FRONT SHELL	SPCC	PALTING:Ni	
2	HOUSING	PBT+30%CF	COLOR:BLACK	
1	TERMINAL	COPPER ALLOY	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS


QUALITY SYMBOLS

□: ☒:
 CRITICAL MAJOR
 ∇: ∇:
 ZERO DEFECT S.P.C

Tolerance

.x ±0.50
 .x ±0.30
 .xx ±0.25

NAME:		5W5公头焊线式光孔POWER D-SUB (客户用图)			PART NO.	B08-5W53114N-X0		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2013/03/16	JINGLI	KING ZHOU		B08-009	



lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL:0769-85181660 85181770

△	2013/03/16	NEW ISSUE	JINGLI	
SIDE	DATE	DESCRIPTION	APPROVER	