


High Power Contact Current Rating:
 10,20 or 40AMPS
 High Power Contact Resistance:
 2.7 Milliohms Max.
 Dielectric Withstanding Voltage:
 1000V AC For 1 Minute
 Insulation Resistance:5000MΩ Min.
 Temperature Range:-25°C to +85°C

PART NO:

B08-AW231140-X1

Current Rating:

- A = 10 AMPS Dim.A Ø1.7
- B = 20 AMPS Dim.A Ø2.8
- C = 30 AMPS Dim.A Ø3.2
- D = 40 AMPS Dim.A Ø4.6

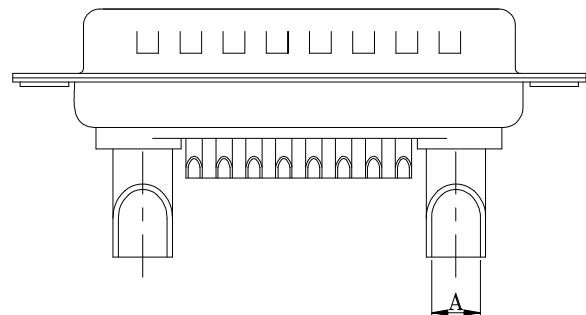

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

- : □ : CRITICAL MAJOR
- ▽ : ▽ : ZERO DEFECT S.P.C

Tolerance

- .x ±0.50
- .x ±0.30
- .xx ±0.25

NAME:

17W2公头焊线式光孔 POWER D-SUB (客户用图)

REV:

A UNIT: mm DRW BY

SCALE:

N:1 DATE: 2014/08/09 JINGLI

PART NO.

B08-AW231140-X1

CHK BY

KING ZHOU

APP BY

DRAWING NO.

B08-017

△

2014/08/09

NEW ISSUE

JINGLI

SIDE

8

DATE

DESCRIPTION


7

APPROVER

6

QUALITY SYMBOLS

5



4

Lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com
 TEL:0769-85181660 85181770

3

2

1