


High Power Contact Current Rating:
 10,20 or 40AMPS
 High Power Contact Resistance:
 2.7 Milliohms Max.
 Dielectric Withstanding Voltage:
 1000V AC For 1 Minute
 Insulation Resistance:5000MΩ Min.
 Temperature Range:-25°C to +85°C

PART NO:
 B08-AW241140-X1

Current Rating:
 A = 10 AMPS Dim.A Ø1.7
 B = 20 AMPS Dim.A Ø2.8
 C = 30 AMPS Dim.A Ø3.2
 D = 40 AMPS Dim.A Ø4.6

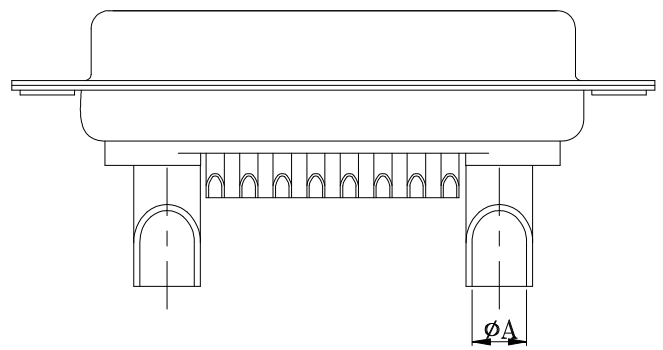

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

				QUALITY SYMBOLS	Tolerance	NAME: 17W2母头焊线式光孔 POWER D-SUB (客户用图)				PART NO.	B08-AW241140-X1		
				□: ☒:	x. ±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.30	SCALE:	N:1	DATE:	2014/08/09	JINGLI	KING ZHOU		B08-018
				▽: ▽:	.xx ±0.25	东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									