
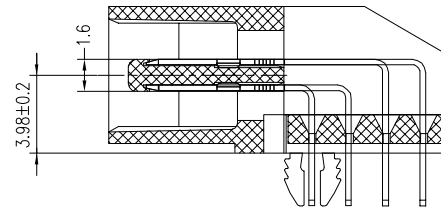



120	74.93	81.01	82.33	86.10	60	120	61
100	62.23	68.31	69.63	73.40	50	100	51
80	49.53	55.61	56.93	60.70	40	80	41
68	41.91	47.99	49.31	53.08	34	68	35
60	36.83	42.91	44.23	48.00	30	60	31
50	30.48	36.56	37.88	41.65	25	50	26
40	24.13	30.21	31.53	35.30	20	40	21
30	17.78	23.86	25.18	28.95	15	30	16
20	11.43	17.51	18.83	22.60	10	20	11
POS	A	B	C	D	G	J	H


Voltage Current Rating:1 AMP.30V AC
Dielectric Withstanding Voltage:500V AC
Contact Resistance:35 mΩ Max.
Insulation Resistance:500MΩ Min.
Temperature Range:-20℃ to +85℃

PART NO.:
B03-XXX51NCN-A2
NO.OF PIN: _____
20: 20P
120: 120P

RoHS COMPLIANT

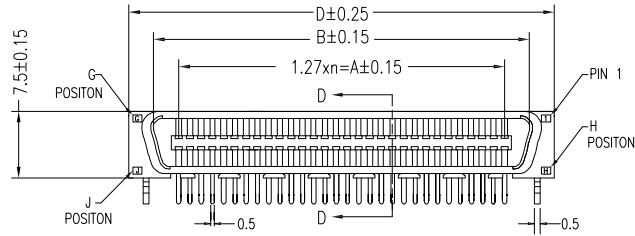


SECTION D-D
SCALE 2:1

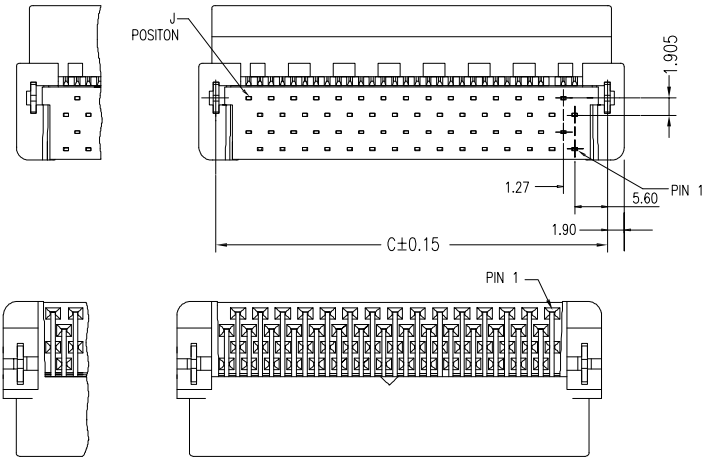


FOR 30, 50 POSITIONS ONLY

FOR 20, 40, 60, 68, 80, 100, 120 POSITIONS ONLY



FOR 30, 50 POSITIONS ONLY

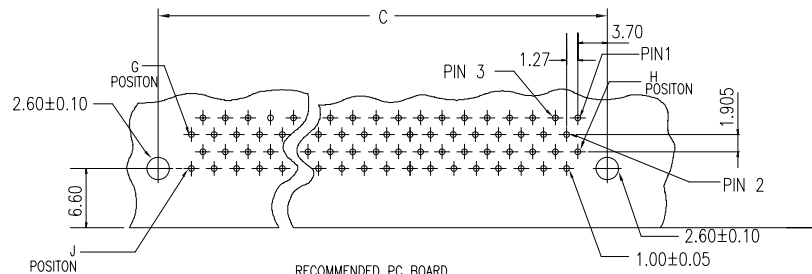

FOR 20, 40, 60, 68, 80, 100, 120 POSITIONS ONLY

RECOMMENDED PC BOARD MOUNTING DIMENSIONS COMPONENT SIDE

3	BOARDLOCKS	COPPER ALLOY	PLATING: Tin	
2	HOUSING	PBT+30%GF	COLOR:BLACK	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△				QUALITY SYMBOLS	Tolerance	NAME:	SCSI MALE 全塑90度DIP (客户用图)			PART NO.	B03-XXX51NCN-A2		
△				□: ⊠:	.x ±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2018/11/22新版发行		King Zhou	CRITICAL MAJOR	.x ±0.50	SCALE:	N:1	DATE:	2018/11/22	DAWN HU	KING ZHOU		B03-088
△				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL:0769-85181660 85181770