



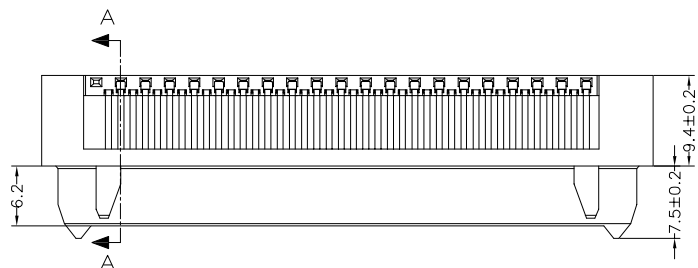
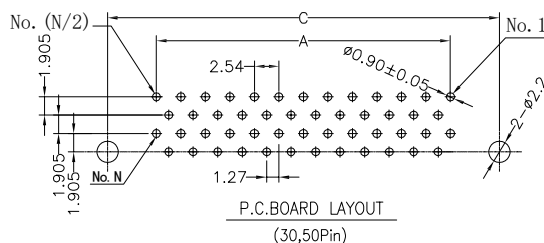
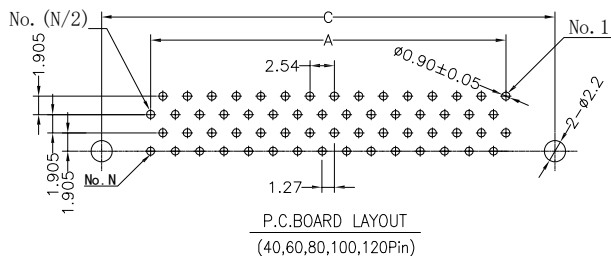


RoHS COMPLIANT

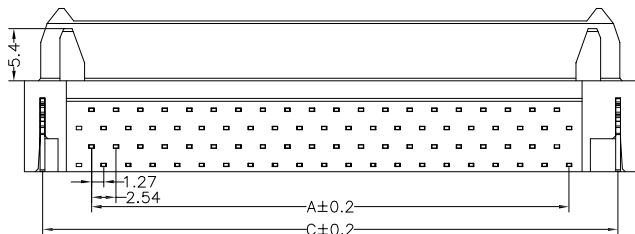

Pin	Dimension mm		
	A	B	C
30	17.78	31.7	27.94
40	24.13	38	34.29
50	30.48	44.4	40.64
60	36.83	50.7	46.99
80	49.53	63.4	59.69
100	62.23	76.1	72.39
120	74.93	88.8	85.09

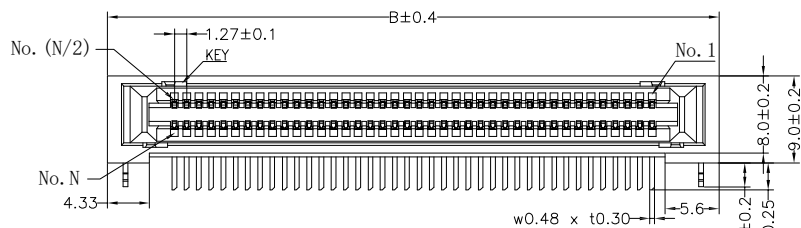

**Voltage Current Rating:1 AMP.**  
**Dielectric Withstanding Voltage:500V AC**  
**Contact Resistance:30 mΩ Max.**  
**Insulation Resistance:500MΩ Min.**  
**Temperature Range:-20℃ to +85℃**

**PART NO.:**  
**B22-XXX61NCN-01**  
**NO.OF PIN:** \_\_\_\_\_  
**20: 20P**  
**?**  
**120: 120P**

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
3	BOARDLOCKS	COPPER ALLOY	PLATING: Tin	
2	HOUSING	PBT+30%GF	COLOR: BLACK	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 3u" SOLDER AREA: Sn UNDER-PLATING: Ni	

SIDE	DATE	DESCRIPTION	APPROVER	QUALITY SYMBOLS	Tolerance	NAME:		PART NO.		REMARKS	
						OPPS FEMALE 90度DIP加强型 (客户用图)	B22-XXX61NCN-01	REV:	UNIT:	DRW BY	CHK BY
△				□:    ⊠:	x.    ±0.80	A	mm	DAWN HU	KING ZHOU		B22-002
△	2019/10/09	新版发行	King Zhou	CRITICAL MAJOR	.x    ±0.50	N:1	DATE: 2019/10/09	DAWN HU	KING ZHOU		B22-002
△				▽:    ▽:	.xx   ±0.25						
				ZERO DEFECT S.P.C							

**Lineconn 东莞市林诚塑胶电子有限公司**      <http://www.lineconn.com>  
 TEL:0769-85181660 85181770