
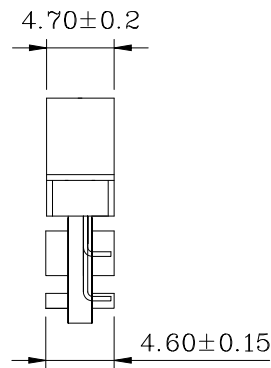


Termination Cover
(2 Places)

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 250V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

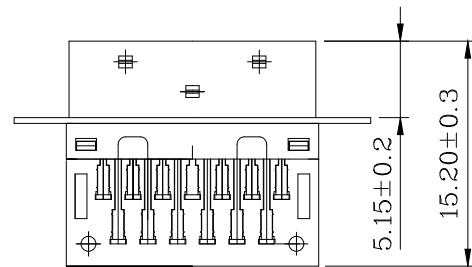


4	COVER	PBT+30%GF	COLOR:BEIGE	
3	HOUSING	LCP+30%GF	COLOR:BEIGE	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	COPPER ALLOY T=0.3mm	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

- : ☒: CRITICAL MAJOR ZERO DEFECT S.P.C

Tolerance	
.x	±0.50
.x	±0.30
.xx	±0.25

NAME:	CISCO 26P PITCH 1.0mm CONNECTOR MALE IDC TYPE (客户用图)				PART NO.	B06-0261C1EN-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2008/04/07	FEI CHEN	KING ZHOU		B06-008	



△	2008/04/07	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5