
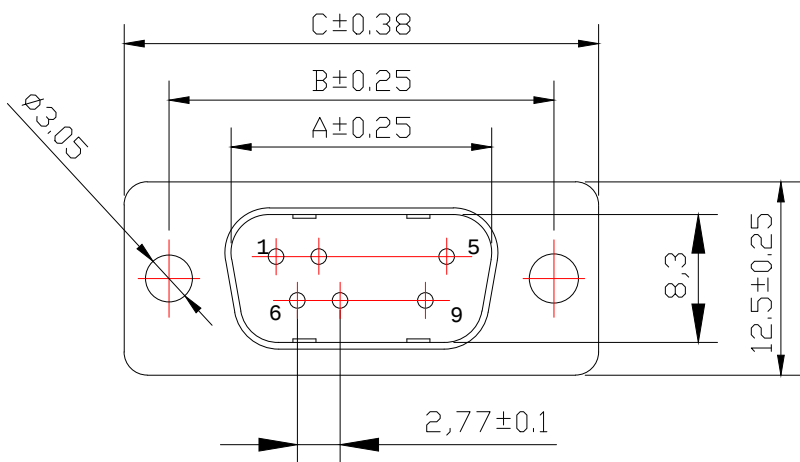
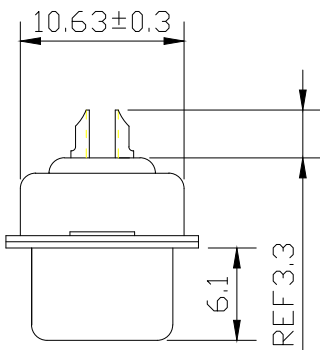


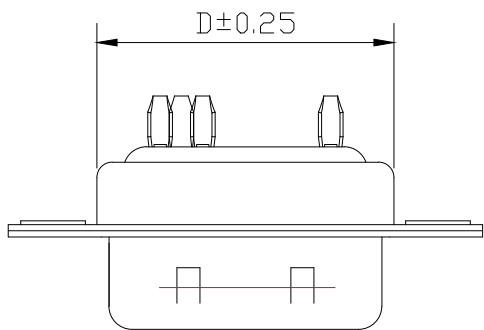

No. of Contact	A	B	C	D
09	16.9	25.0	30.8	19.3
15	25.2	33.3	39.1	27.5
25	39.0	47.0	53.0	41.3
37	55.4	63.5	69.3	57.7

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000M Ω Min.
Temperature Range:-25℃ to +85℃

PART NO:
B05-0XX3X14N-02

NO.OF CONTACT:

09 = 9 pos
15 = 15 pos
25 = 25 pos
37 = 37 pos

HOUSING COLOR:

1 = BLACK
5 = WHITE
6 = BLUE

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PBT+30%GF	COLOR: SEE PART NO.	
1	TERMINAL	COPPER ALLOY	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

△	2009/04/14	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolence		NAME:	D-SUB 公头车针焊线式 (客户用图)					PART NO.		B05-0XX3X14N-02	
□:	☒:	x.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2009/04/14	JINGLI	KING ZHOU		B05-014		
		.xx	±0.25										
▽:	▽:	 		lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770				
ZERO DEFECT S.P.C													

http://www.lineconn.com
TEL:0769-85181660 85181770