


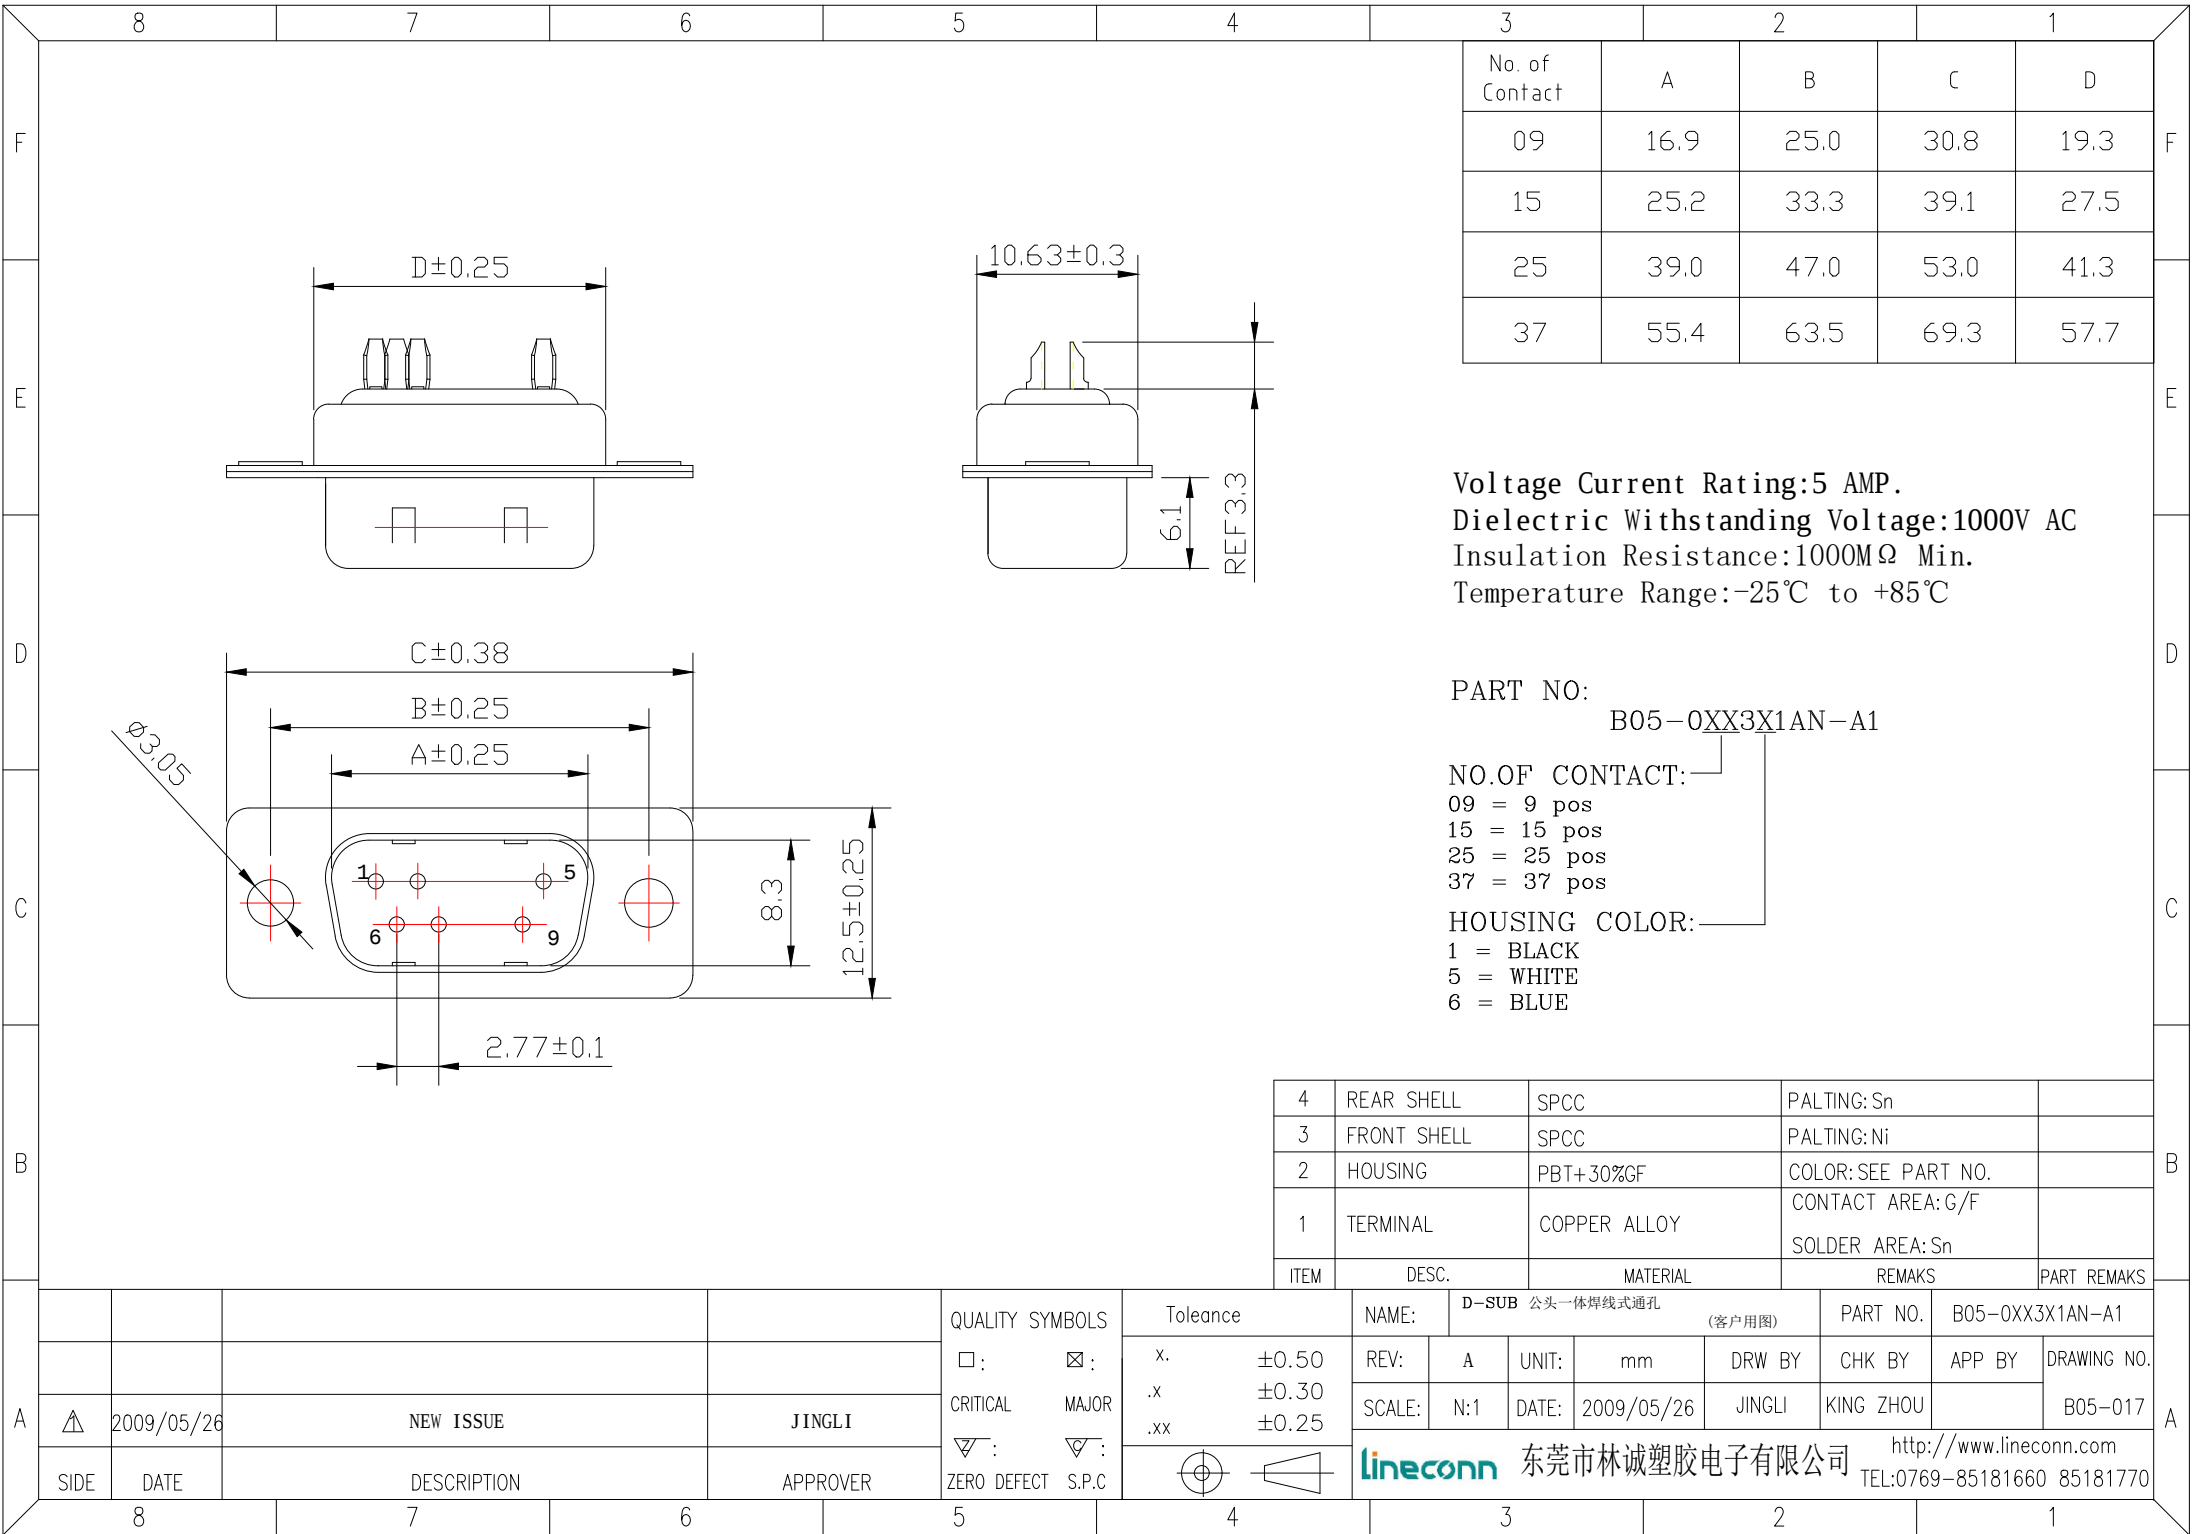

No. of Contact	A	B	C	D
09	16.9	25.0	30.8	19.3
15	25.2	33.3	39.1	27.5
25	39.0	47.0	53.0	41.3
37	55.4	63.5	69.3	57.7

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO: B05-0XX3X1AN-A1

NO.OF CONTACT:

- 09 = 9 pos
- 15 = 15 pos
- 25 = 25 pos
- 37 = 37 pos

HOUSING COLOR:

- 1 = BLACK
- 5 = WHITE
- 6 = BLUE

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PBT+30%GF	COLOR: SEE PART NO.	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F	
			SOLDER AREA: Sn	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

NEW ISSUE	JINGLI		
DESCRIPTION	APPROVER		
SIDE	DATE		
8	7	6	5

QUALITY SYMBOLS	Tolerance
□: CRITICAL	x. ±0.50
⊠: MAJOR	.x ±0.30
▽: ZERO DEFECT	.xx ±0.25
S.P.C	

NAME:	D-SUB 公头一体焊线式通孔	PART NO.	B05-0XX3X1AN-A1
REV:	A	CHK BY	APP BY
SCALE:	N:1	DATE:	DRAWING NO.
		2009/05/26	B05-017
lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com	
		TEL:0769-85181660 85181770	
4	3	2	1